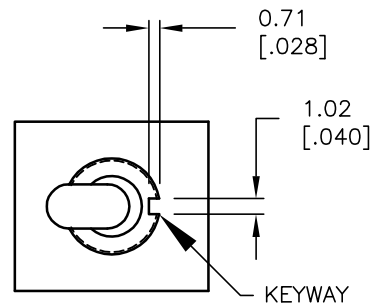

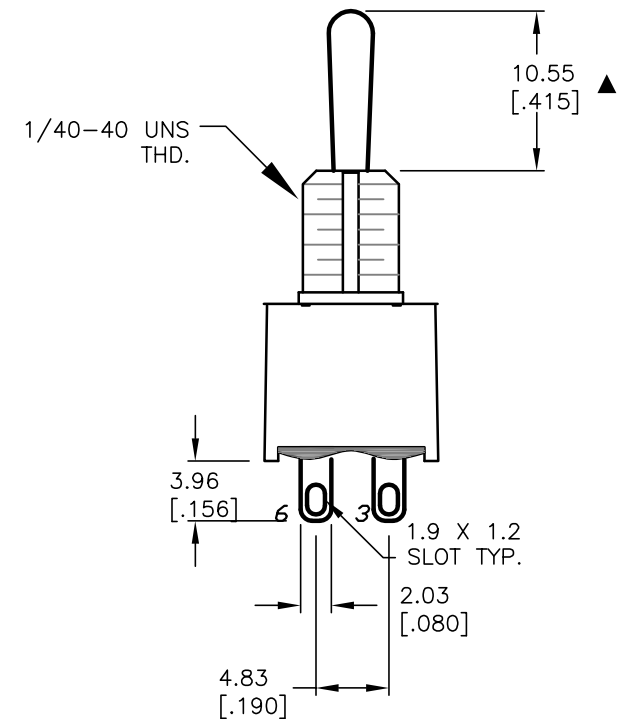
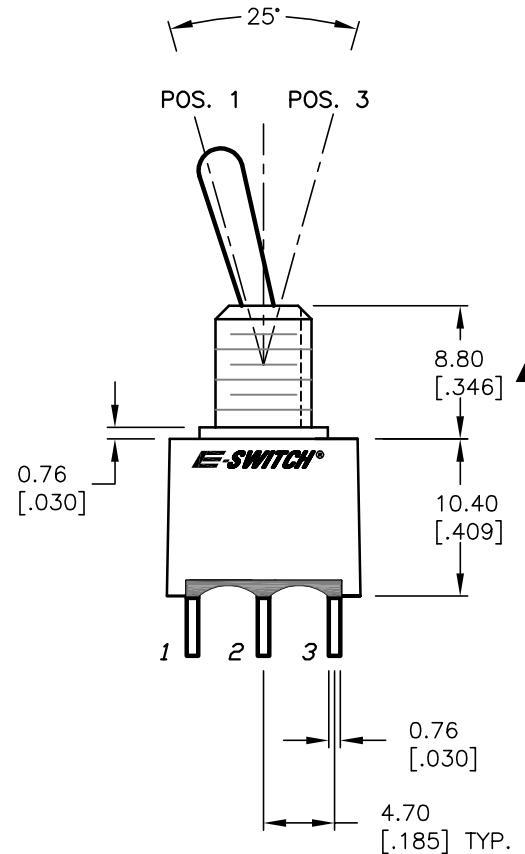
***BOTTOM VIEW*****CIRCUIT: DPDT
CONTACT CONFIGURATION**

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- RATING: 5A @120VAC or 28VDC
2A @250VAC (w/RESISTIVE LOAD)
- FIXED TERM. & MOVING CONTACT:
Cu Alloy w/Silver plate
- ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

***E-SWITCH®***

TITLE

100AWDP1T1B1M1QE

SCALE

2:1

DATE

6/17/04

DR

AR

DWG

T102112

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	14093	RELEASED FOR PRODUCTION	6/17/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD