

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------


E1

REVISÉ PER ECR 07-018343

06AUG07

JR

	TM
--	----

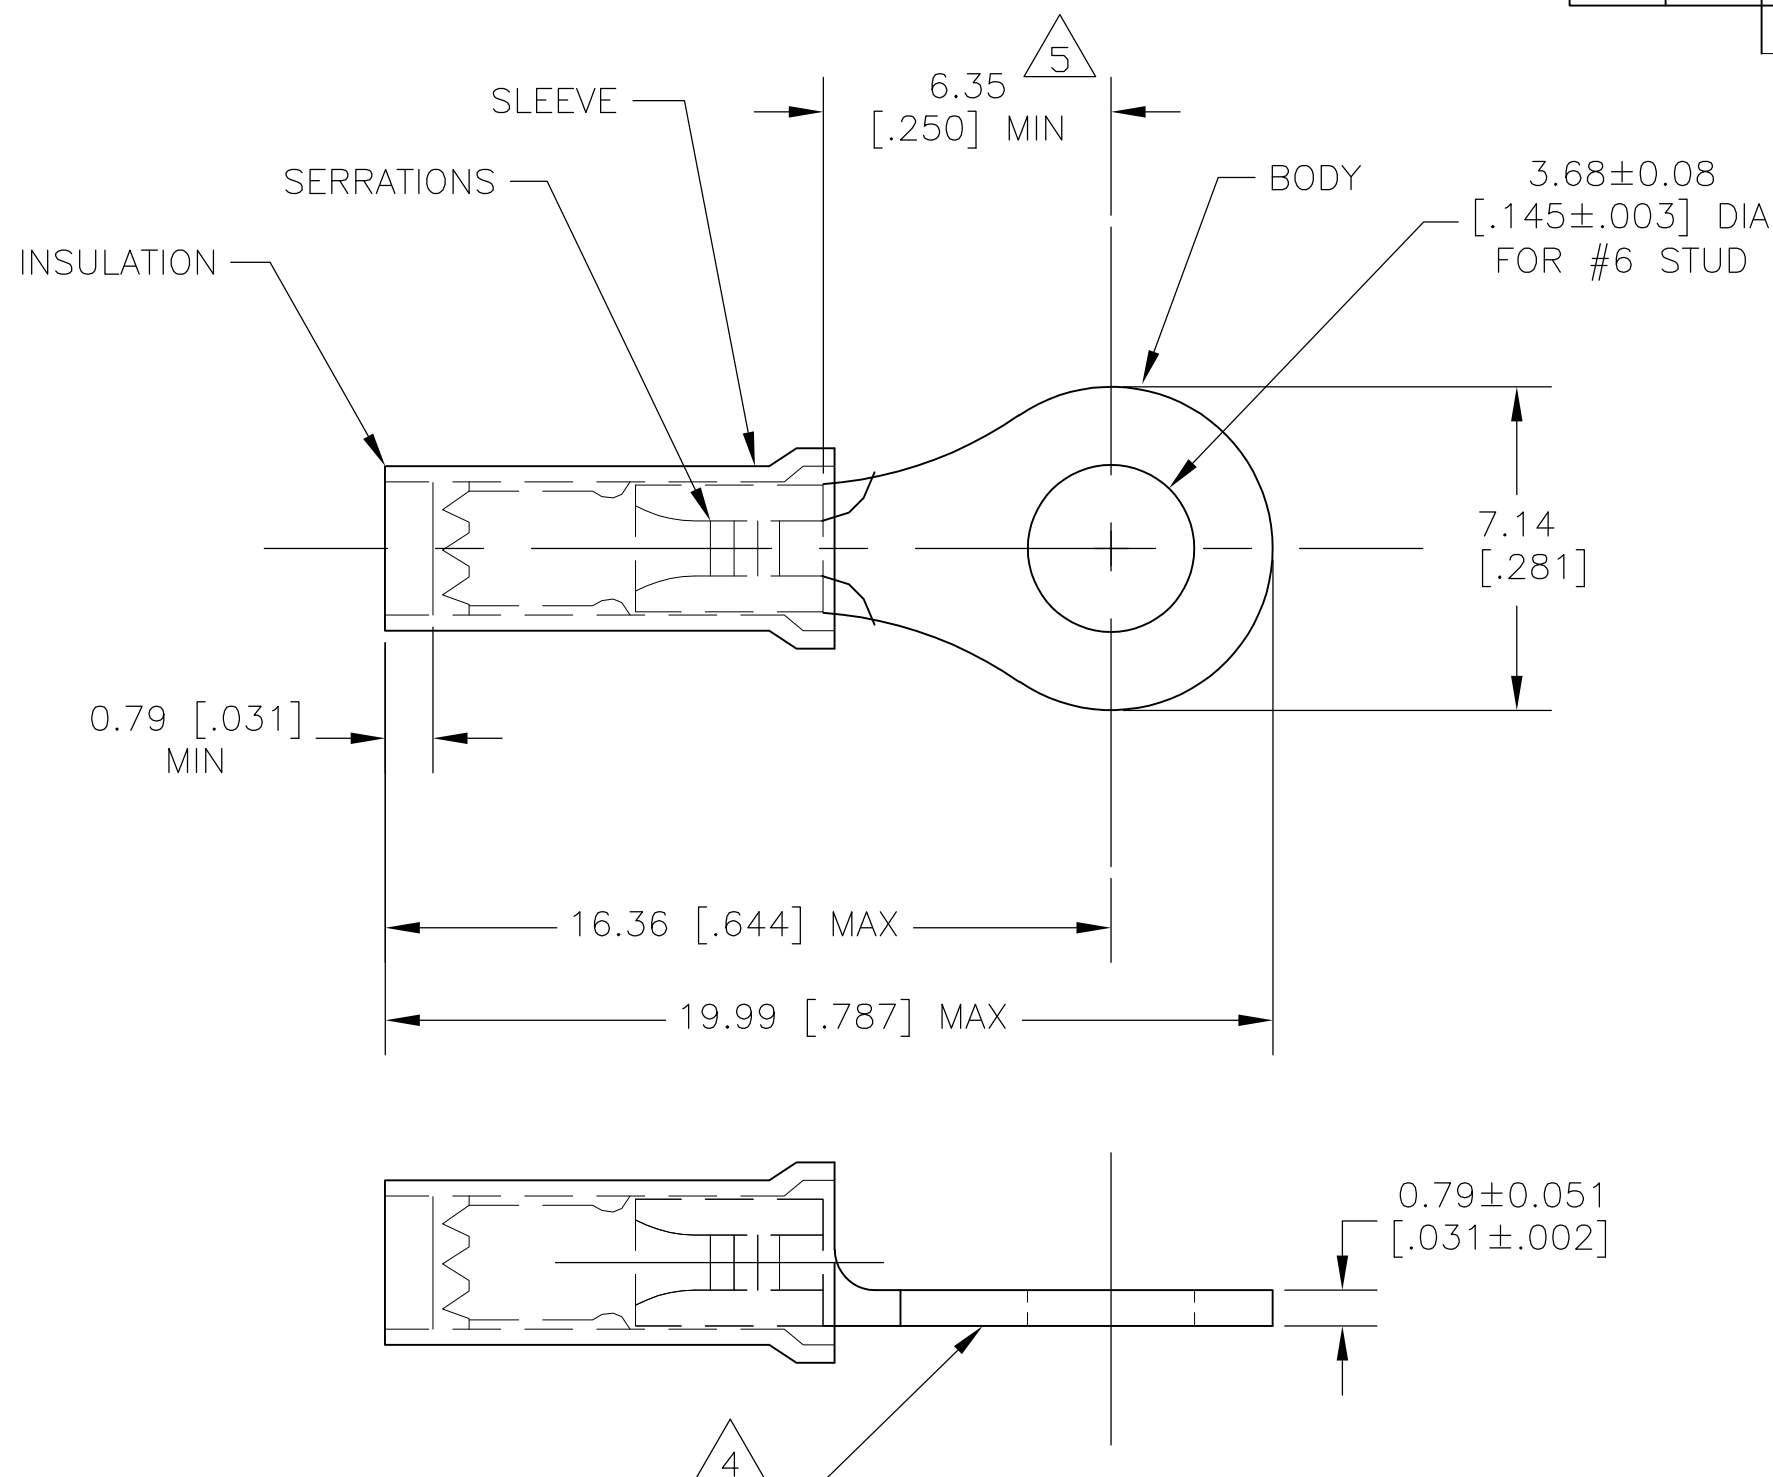

- 1 BODY - COPPER PER ASTM B152
ANNEALED
SLEEVE - COPPER PER ASTM
B152
INSULATION - NYLON
- 2 BODY & SLEEVE - TIN PLATED
INSULATION - COLOR - PURPLE
- 3 FOR 1.14-2.03 [.045-.080] DIA
WIRE INSULATION
- 4 STAMP AMP 20, APPROX WHERE
SHOWN.
- 5 APPLIES FROM EDGE OF METAL
WIRE BARREL TO CENTERLINE
OF STUD HOLE.
- 6 0.41-0.65mm² [810-1,290] CMA
SOLID OR STRANDED

1000	LOOSE PIECE	152895
QTY	PACKAGING TYPE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth 06AUG07		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		T MICHELUTTI		RING TONGUE, PIDG	
		APVD T MICHELUTTI 30AUG07		—	
0 PLC ± —		PRODUCT SPEC		—	
1 PLC ± —		APPLICATION SPEC		—	
2 PLC ± —		—		—	
3 PLC ± 0.38 [0.15]		WEIGHT		—	
4 PLC ± —		FINISH		—	
ANGLES ± 5°		CUSTOMER DRAWING		SCALE 6:1	
MATERIAL		SHEET 1 OF 1		REV F1	