


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REV PER ECO-16-009651	29JUL2016	RS	CT

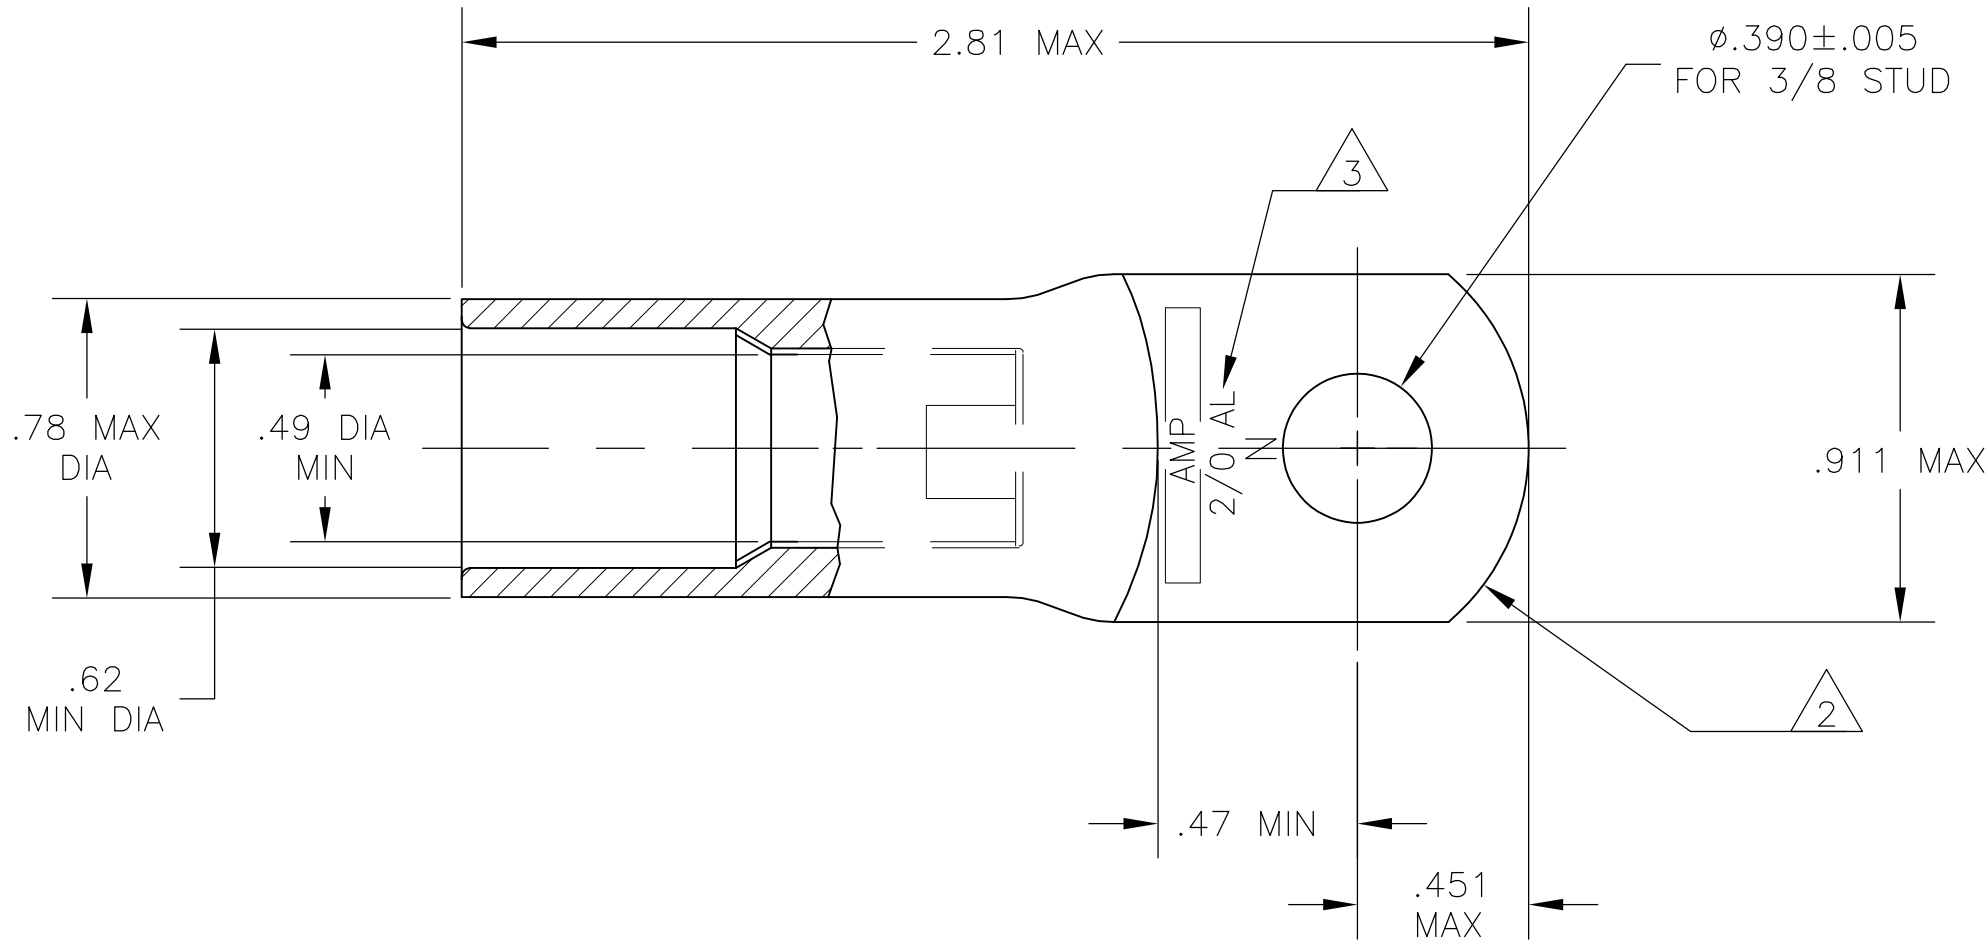

- 1 WIRE INSULATION: .490—.574 DIA
- 2 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.
- 3 STAMP "AMP 2/0 AL N"
SIZE AND LOCATION APPROX AS SHOWN

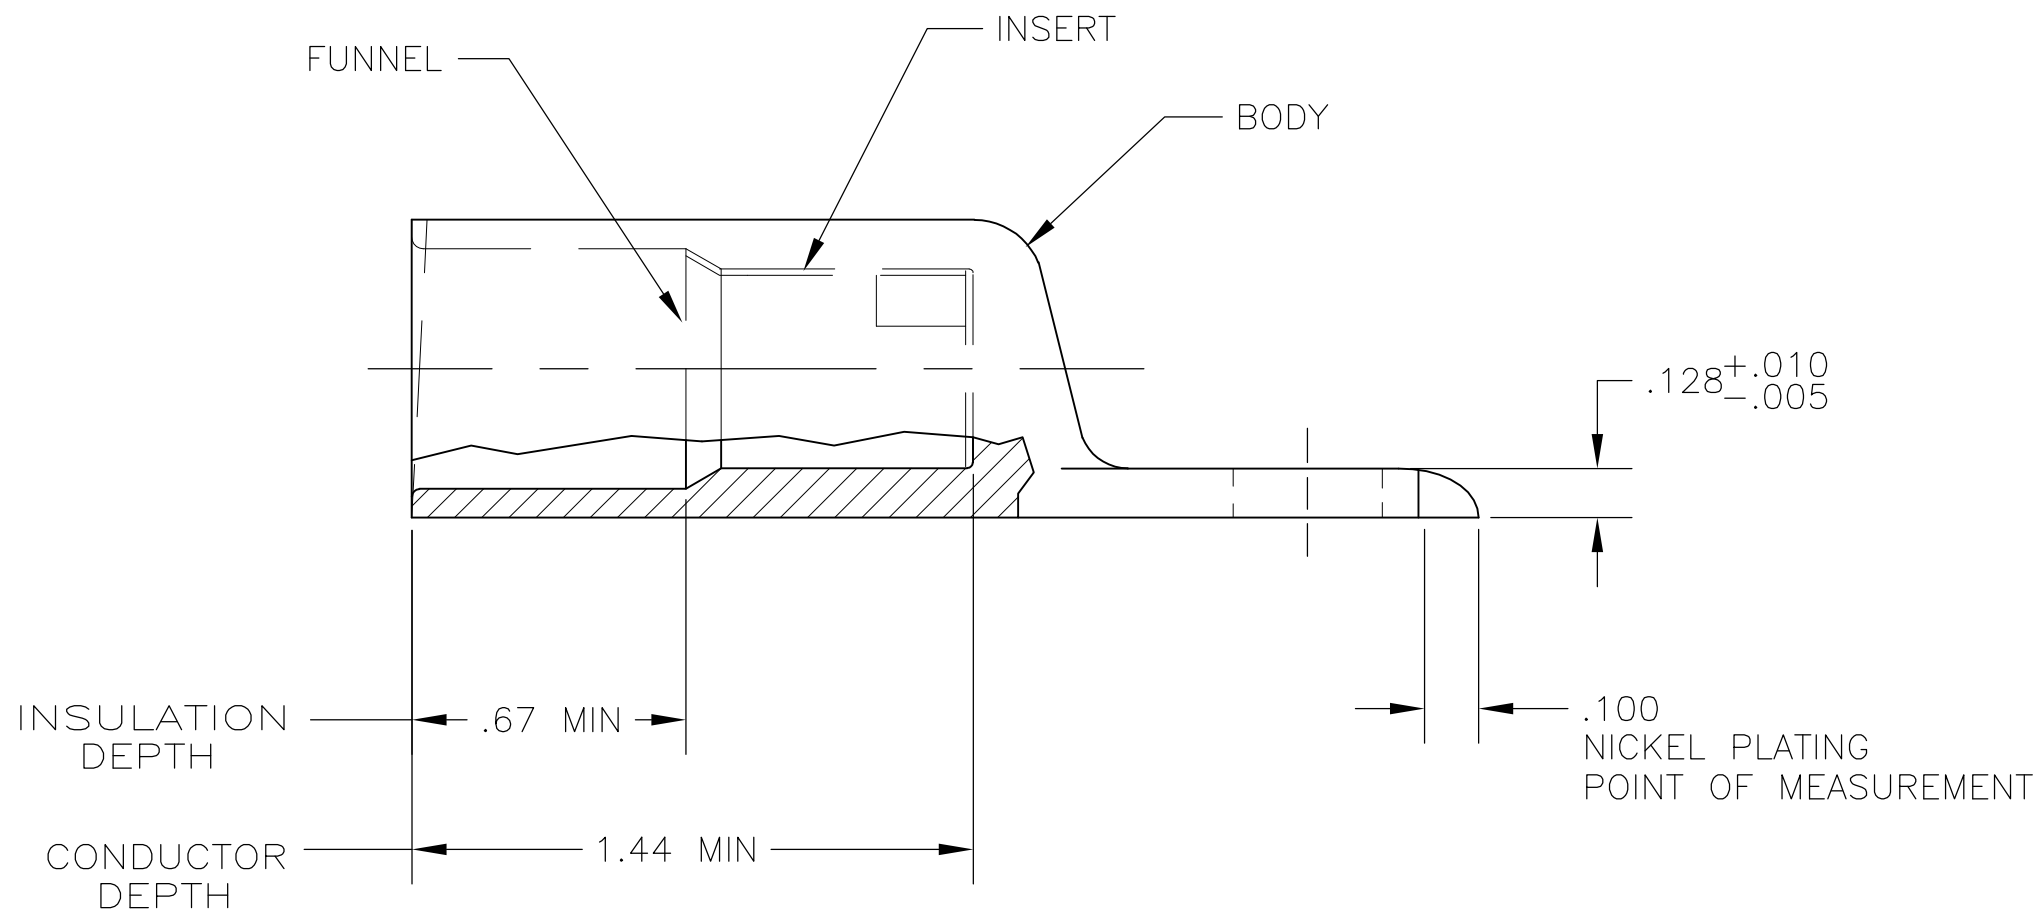

INSERT & FUNNEL: BRASS MIL-C-50 NICKEL PL QQ-N-290 .000100 MIN THK	1958058-1
BODY: COPPER ASTM-B187 ANNEALED NICKEL PL .000300 MIN THK PER QQ-N-290	
MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 05JAN07	TE Connectivity			
DIMENSIONS: INCHES		CHK JOHN KNOLL 05JAN07				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD JOHN KNOLL 05JAN07	NAME WIRE TERMINAL, RING TONGUE, SEALED COPALUM, WIRE SIZE: 2/0 ALUMINUM			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT 81 GRAMS	SIZE A2	CAGE CODE 00779	DRAWING NO C=1958058	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 of 1	REV E	