


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT - BY - ALL RIGHTS RESERVED.

1. MATERIAL:
BODY: ALUMINUM PER ASTM B317
INSERT: BRASS PER ASTM B36
2. FINISH:
BODY: .000600 MIN MATTE TIN PER ASTM B545
OVER .000060 MIN NICKEL PER ASTM B733.
INSERT: .000150 MIN MATTE NICKEL PER QQ-N-290
3. PTFE DRY LUBRICANT 360 DEGREE ON OUTER DIAMETER
OF CRIMP BARREL IN ZONE SHOWN.
4. WIRE INSULATION RANGE: .340-.417.
5. SEE TE CONNECTIVITY APPLICATION SPEC. 114-32098
FOR APPLICATION REQUIREMENTS.
6. SEE TE CONNECTIVITY INSTRUCTION SHEET 408-32087
FOR TOOLING AND CRIMP INSTRUCTIONS, FIGURE 3 FOR
WIRE STRIPPING DETAIL.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		D	REV PER ECO 19-019307	3-6-20	CT	PD

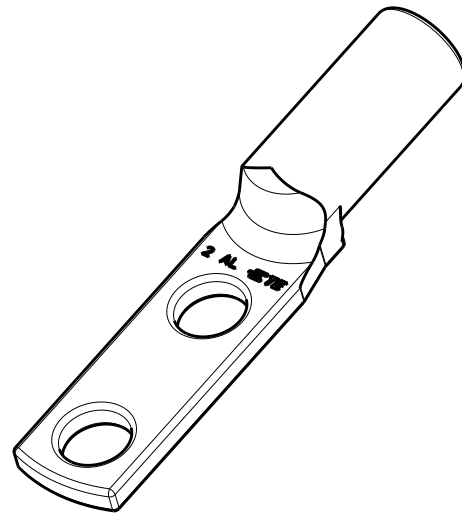

SCALE 1:1

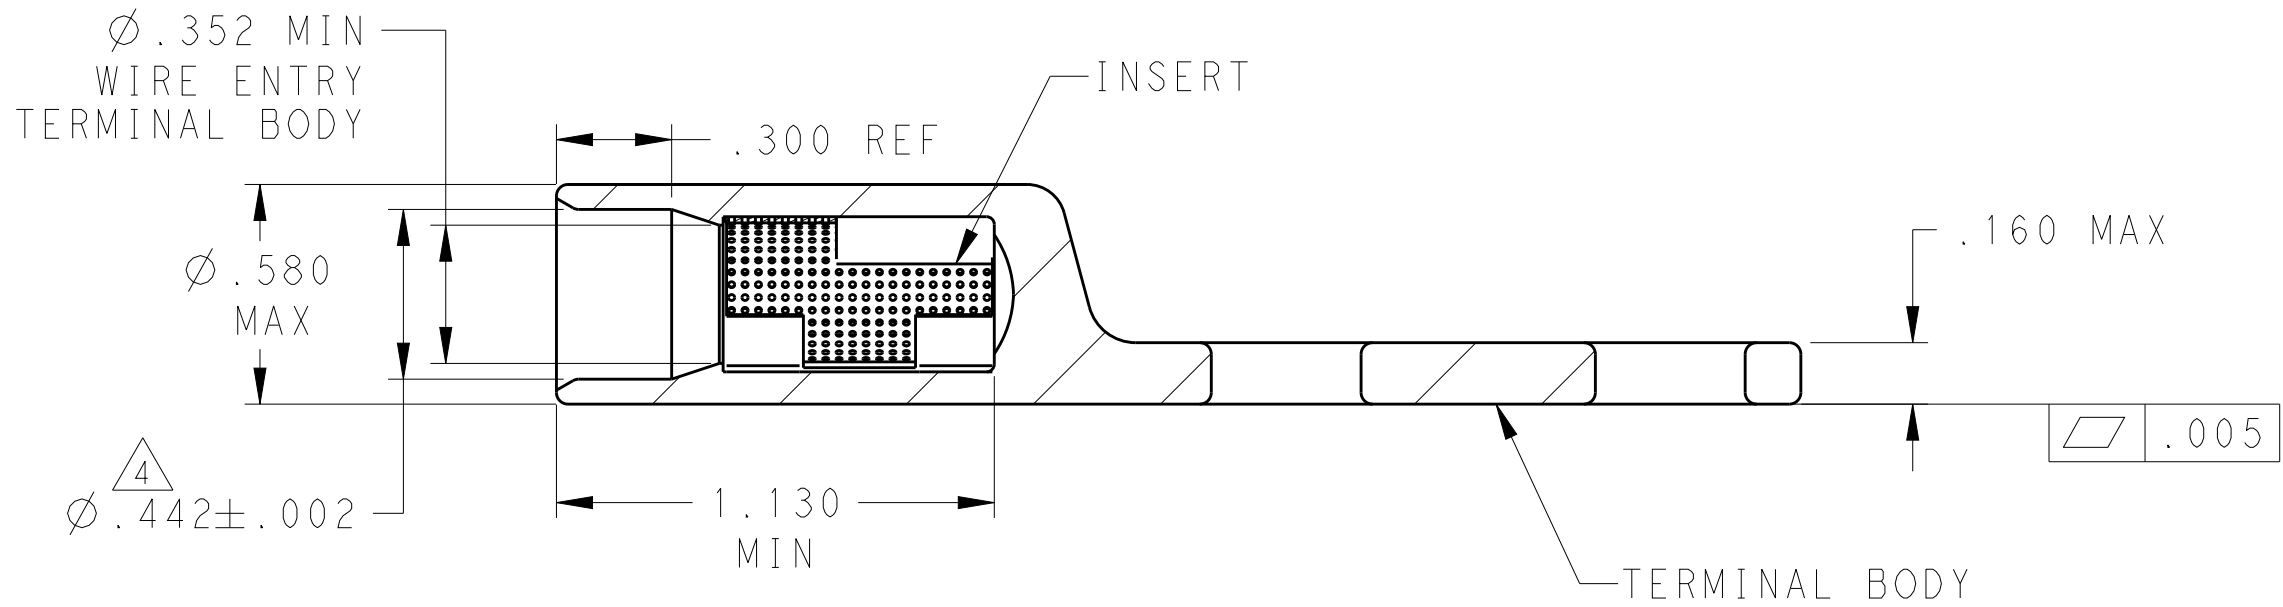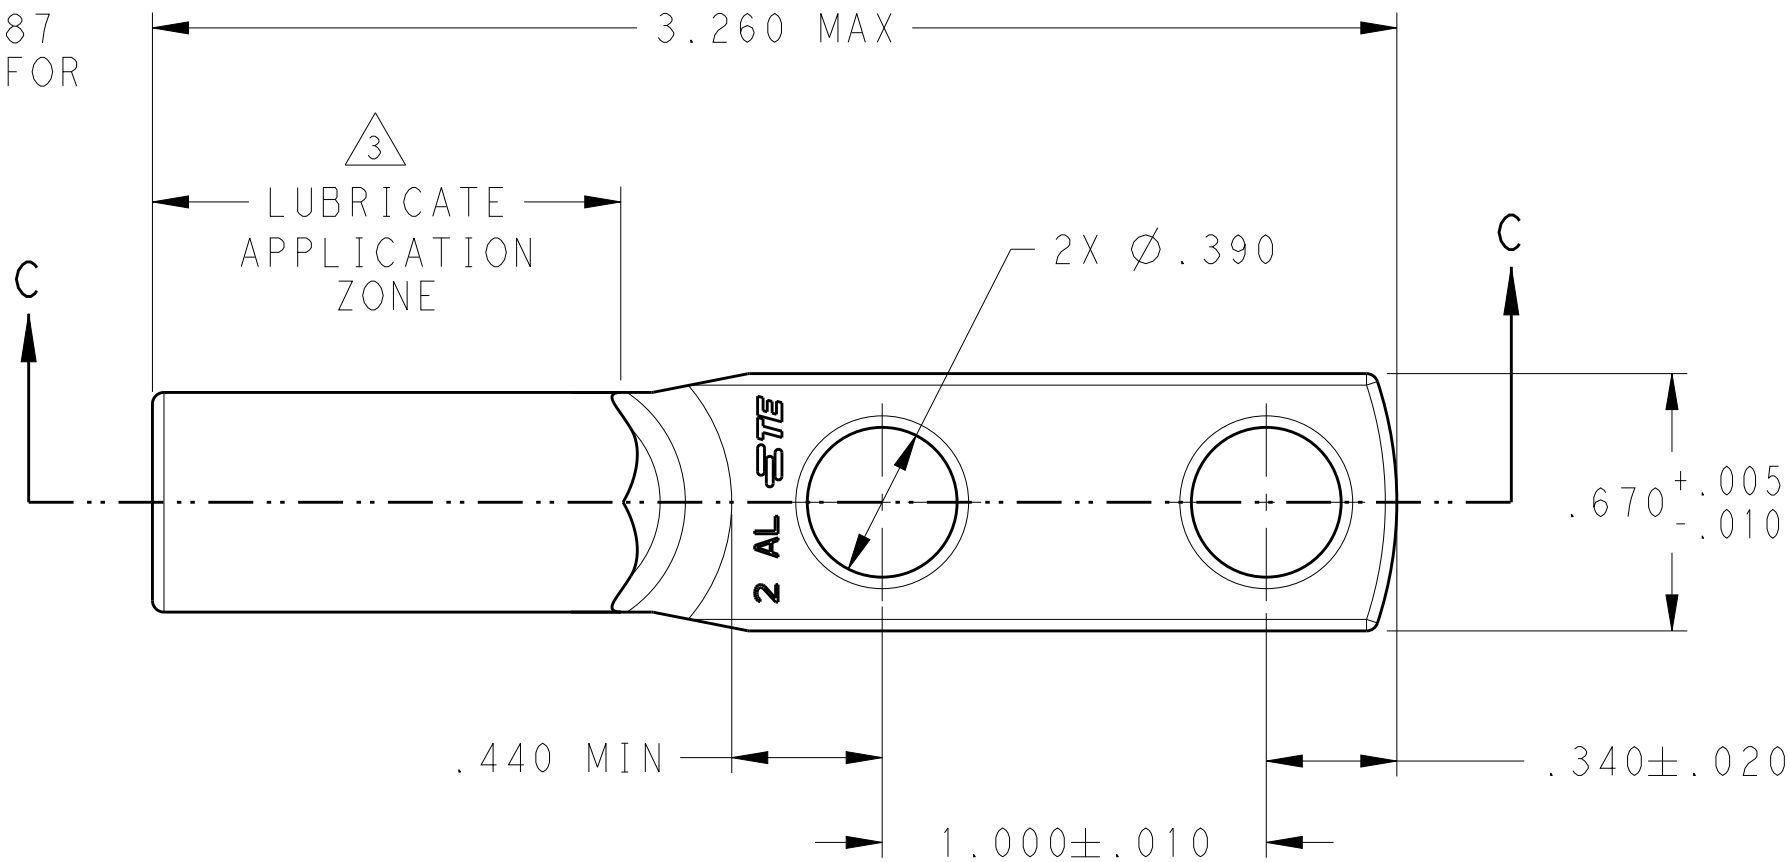

SECTION C-C

2102579-1

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Brent D. Yohn 07APR2014	 TE Connectivity			
DIMENSIONS: INCHES		CHK K.A.DeBock 07APR2014				
		APVD K.A.DeBock 07APR2014	NAME TERMINAL ASSEMBLY, STRAIGHT, ALUMINUM DUAL HOLE, SIZE 2 AWG			
		PRODUCT SPEC -	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	SIZE A200779		CAGE CODE C-2102579	RESTRICTED TO -
MATERIAL SEE NOTES		WEIGHT -	SCALE 2:1		SHEET 1 OF 1	REV D
SEE NOTES		Customer Drawing				