


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECN-21-107697	30JUN2021	PZ	WKH

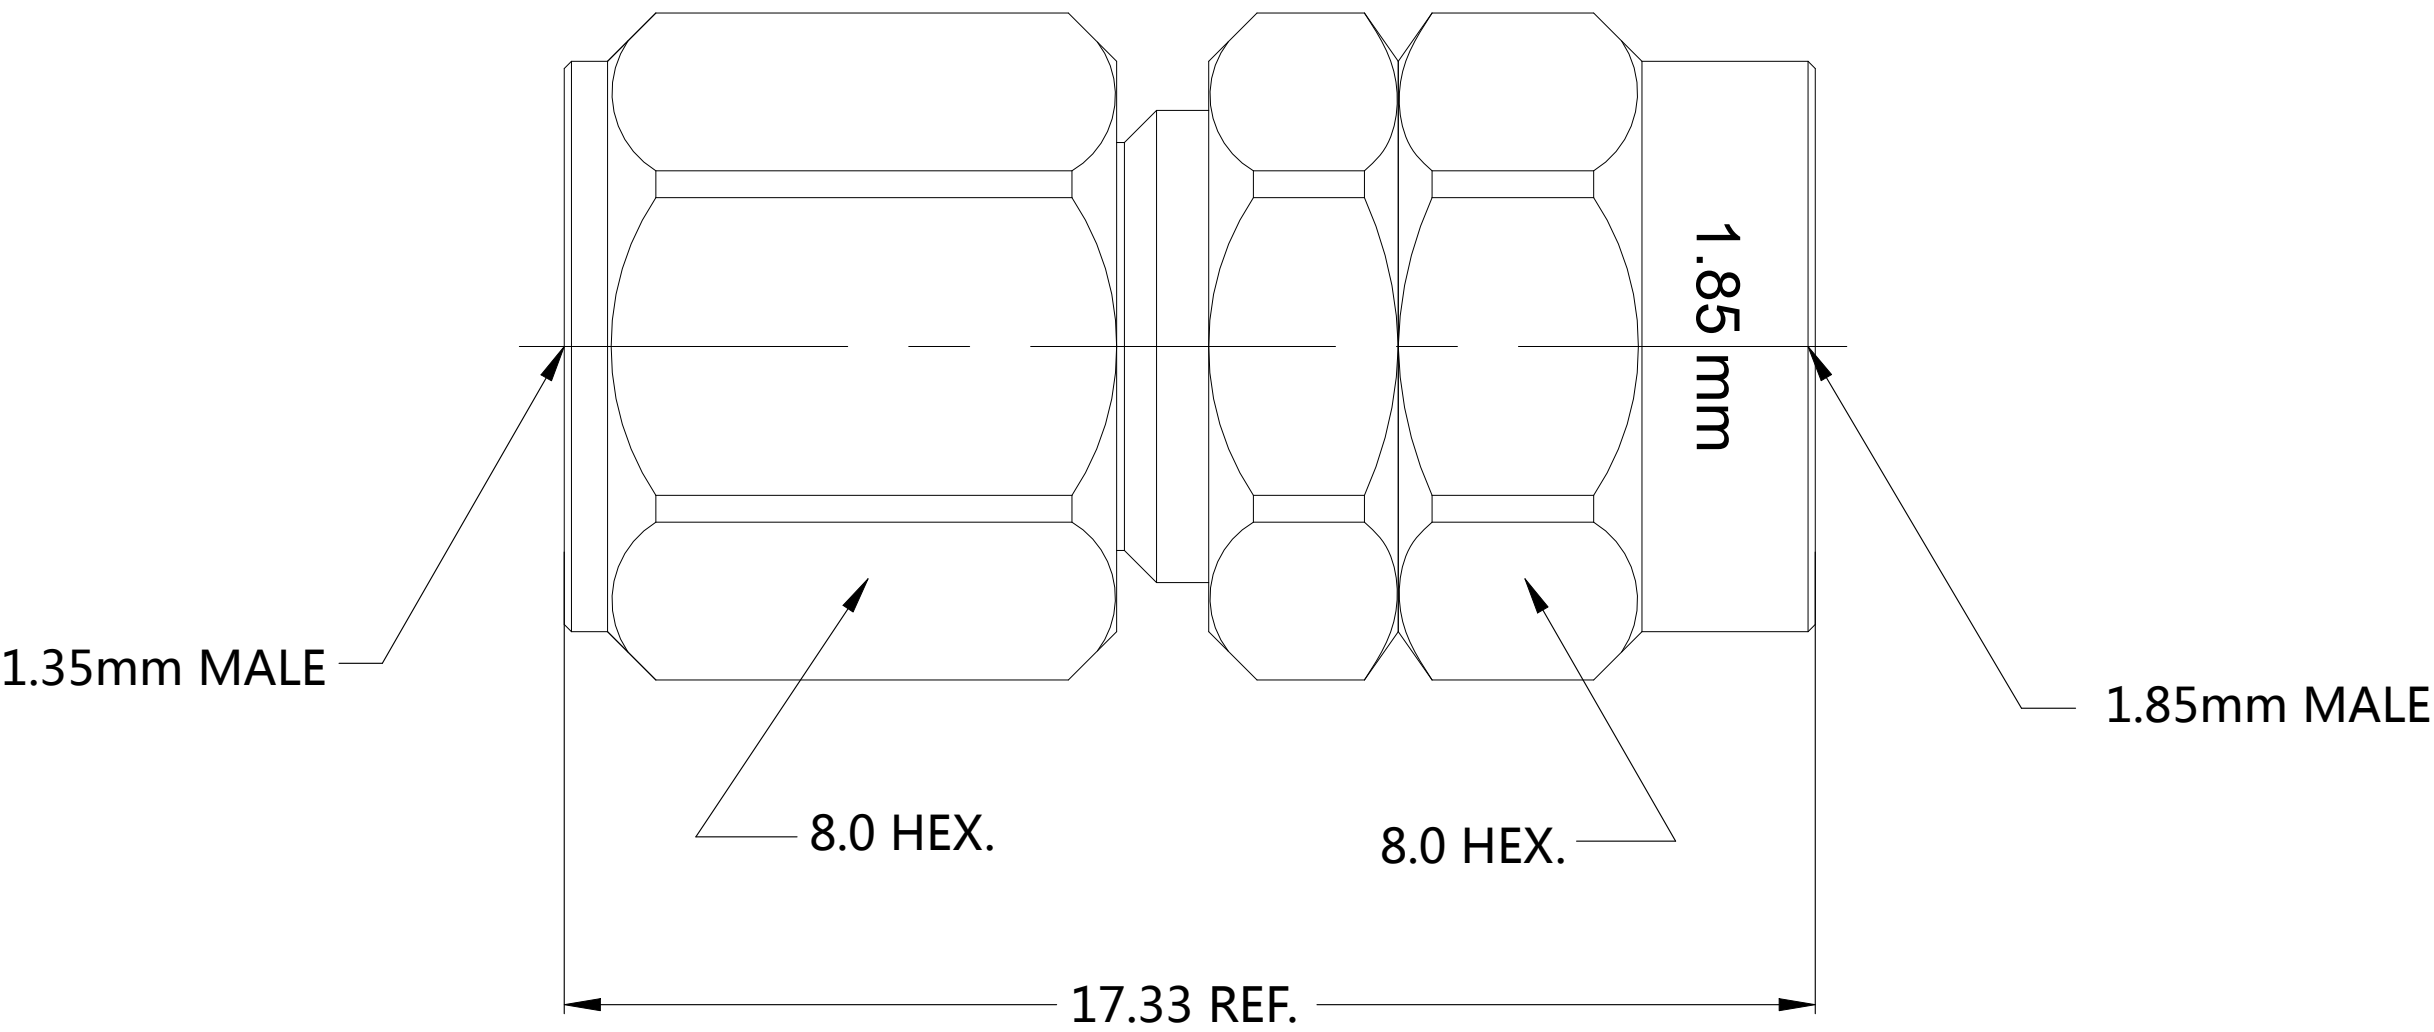

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Impedance (Ohm): <u>50</u> Frequency Range: <u>DC to 67GHz</u> Voltage Rating (Peak) @ Sea Level <u>150 V RMS</u> Insulation Resistance (MIN.) <u>5000 M ohms</u> Contact Resistance (mohms MAX) Center Contact <u>4.0</u> Outer Contact <u>1.0</u> Dielectric Withstand Voltage: <u>500 V RMS Max</u> Insertion Loss : TBD VSWR: <u><1.33 @ DC ~ 67GHz</u>	Interface Dimension <u>1.85mm male and 1.35mm male</u> Force to Engage and Disengage Engage: <u>N/A</u> Disengage: <u>N/A</u> Center Contact Captivation Axial (N) <u>26.0 MIN</u> Radial (In/Oz) <u>N/A</u> Cable Retention Axial (Lbs) <u>N/A</u> Mating cycles <u>500</u> cycles	TEMPERATURE RANGE <u>-40 °C~+85 °C</u> ROHS <u>COMPLIANT</u>

1	SHELL	STAINLESS STEEL	PASSIVATION
1	CONTACT PIN	BERYLLIUM COPPER	GOLD 50 u"/NICKEL /COPPER
1	INSULATOR	PEI	N/A
1	BODY	STAINLESS STEEL	PASSIVATION
2385340-1	PART NUMBER	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN PENG ZHAI 27JAN2021		TE Connectivity			
		CHK ROGER SONG 27JAN2021					
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD WENKE HE 27JAN2021		NAME	
		0 PLC ± -		PRODUCT SPEC		1.35mm Male to 1.85mm Male Adapter -	
		1 PLC ± 0.3		-			
		2 PLC ± 0.2					
		3 PLC ± 0.1		APPLICATION SPEC			
		4 PLC ± -		-			
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
-		-		-		-	
CUSTOMER DRAWING				SIZE		CAGE CODE	
				A2		00779	
				DRAWING NO		C=2385340	
				SCALE		SHEET	
				1:1		1 of 1	
				REV		A	

2385340