


3-1393642-2 Product Details

[Live Product Chat](#)

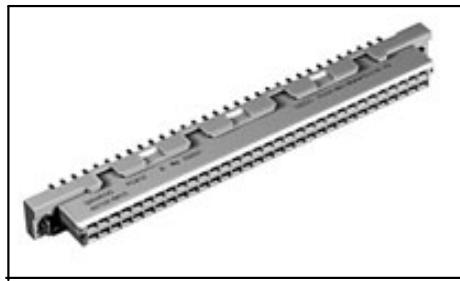

3-1393642-2

TE Internal Number: 3-1393642-2

[Active](#)

Eurocard Type B

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector Type = Receptacle
- 64 Positions
- PCB Mount Angle = Vertical
- Post Type = Wire Wrap
- Not Make First / Break Last

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(6\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • EUROCARD CONNECTORS PER DIN 41612 AND IEC 603-2 (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling • Mating Products (6)
---	---

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Connector Type = Receptacle • Number of Positions = 64 • PCB Mount Angle = Vertical • Post Type = Wire Wrap • Make First / Break Last = No • DIN Level = II • Size = Standard • PCB Retention Feature = No • Color = Gray <p>Termination Related Features:</p> <ul style="list-style-type: none"> • Termination Post Length (mm [in]) = 20.00 [0.788] <p>Body Related Features:</p> <ul style="list-style-type: none"> • Contact Cross Section (mm [in]) = 0.60 [.024] Sq. • Rows Loaded = A, B • Positions Loaded = Fully Loaded 	<p>Contact Related Features:</p> <ul style="list-style-type: none"> • Contact Base Material = Copper Alloy <p>Housing Related Features:</p> <ul style="list-style-type: none"> • Housing Material = Polyester GF • Housing Flammability Rating = UL 94V-0 <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • Flux-Tight Coating = Without • RoHS/ELV Compliance History = Converted to comply with RoHS directive <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Terminate To = Printed Circuit Board <p>Other:</p> <ul style="list-style-type: none"> • Brand = AMP
--	--

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)