


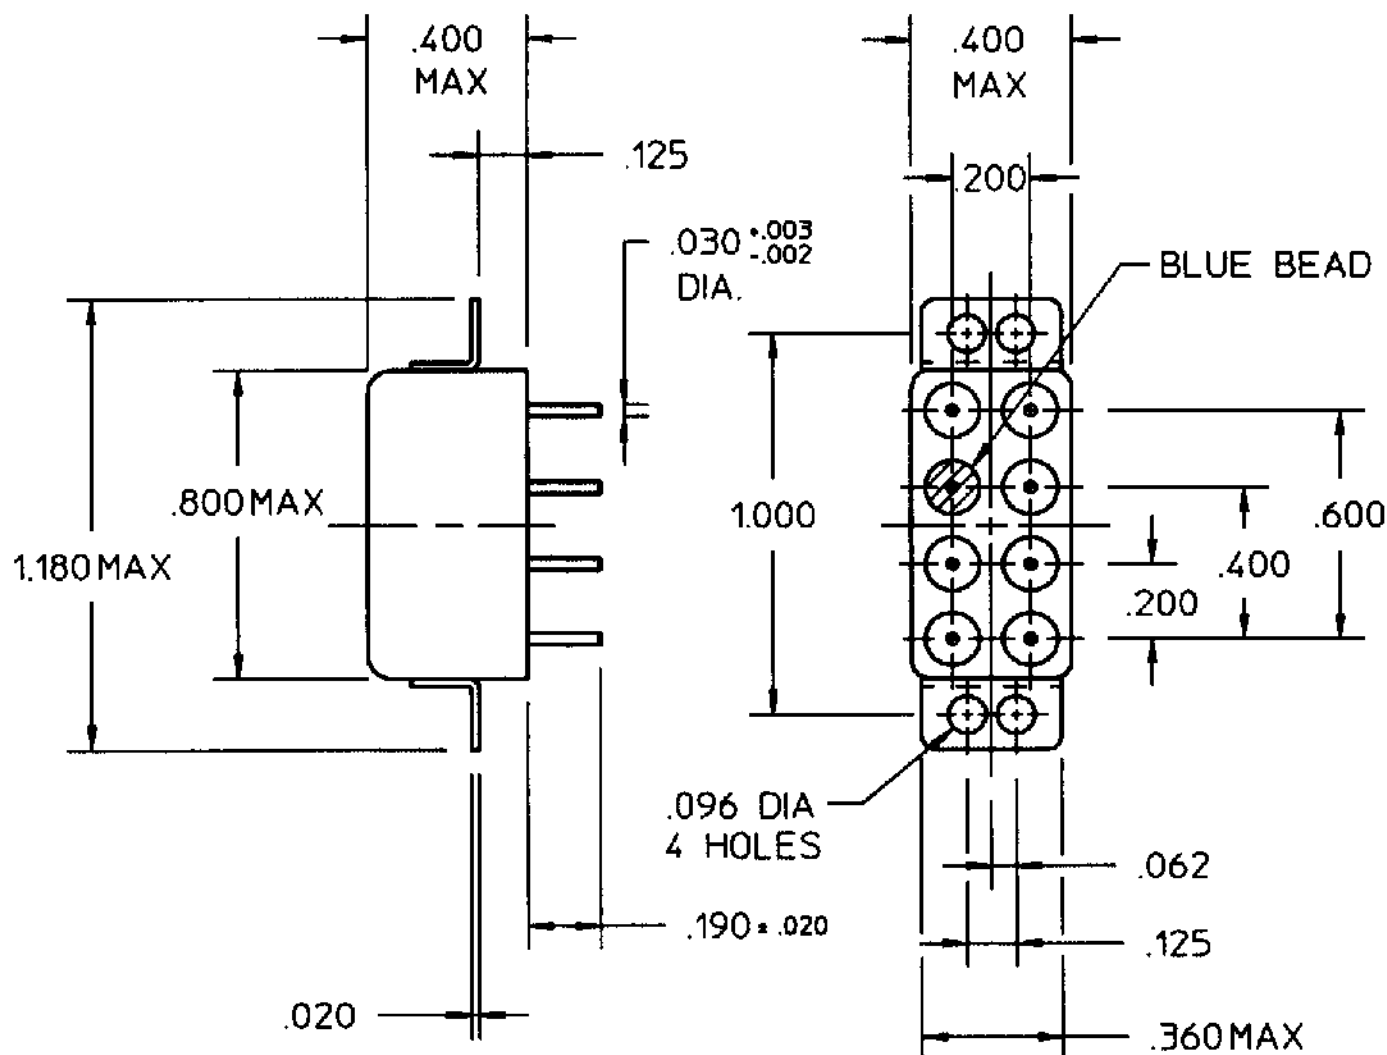

COIL:


RESISTANCE 1620 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 22.5-44.0 VDC
 MUST OPERATE 14.3 VDC
 MUST RELEASE 8.6 VDC MAX 1.4 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 6 MS MAX
RELEASE TIME 5 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

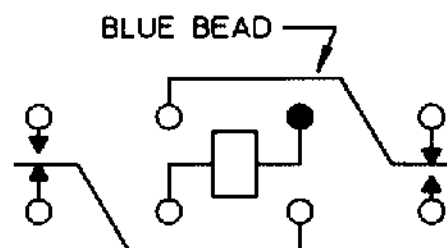

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/4/92 CK. 6/10/92

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. GENICOM
 CUST. NO. 3SAV5014L2

TYPE "HMS" RELAY

HMS1206S01