

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


D

REV / 0L20-0040-96

06JAN97

ME

TM

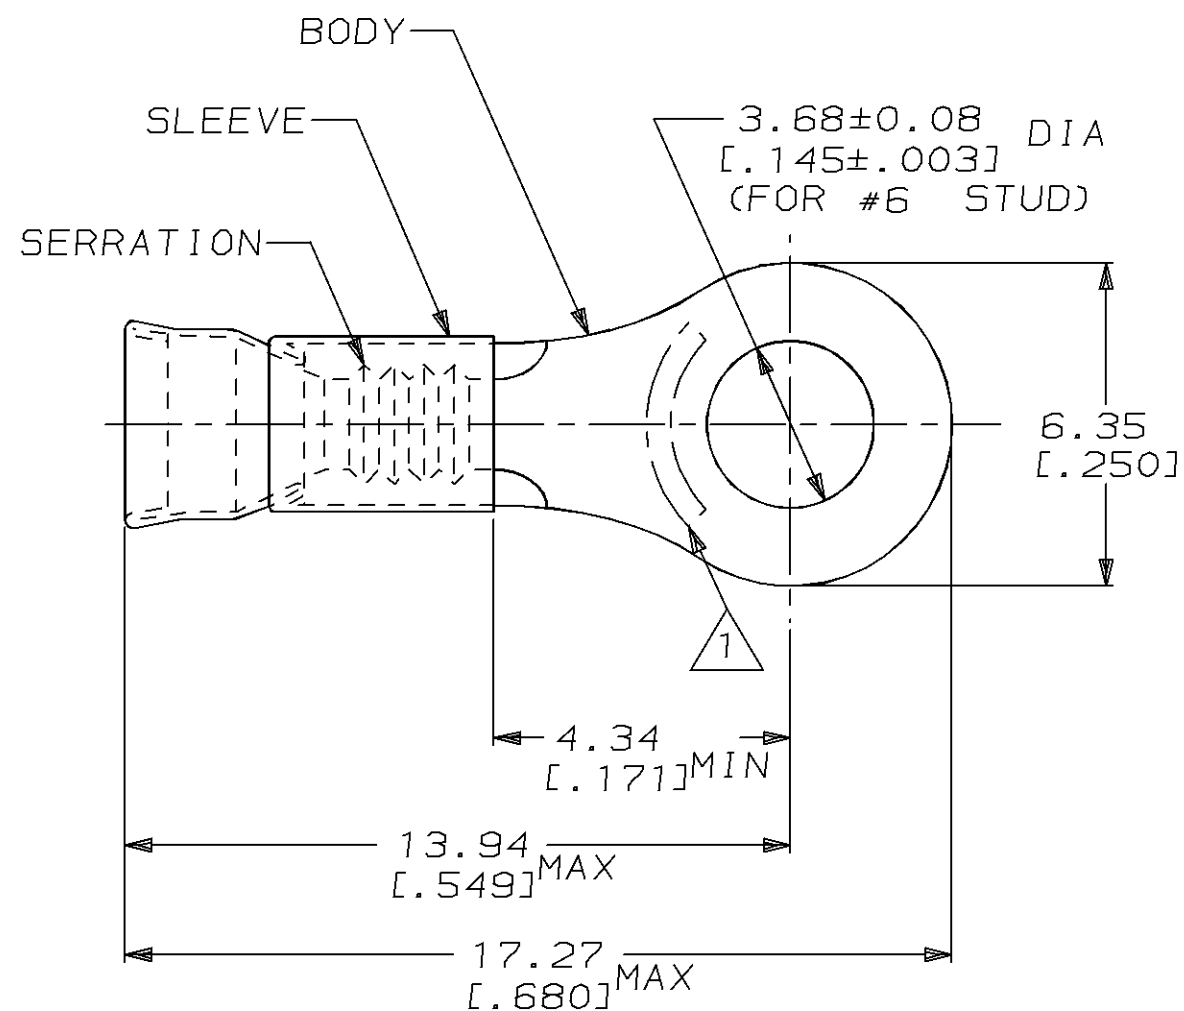

1 STAMP AMP 16-14* APPROX AS SHOWN

2. WIRE INSUL DIA, 2.03-3.30 [0.080-.130]

3. TONGUE MATL THK, 0.79 ± 0.05 [0.031 ± 0.002]

1000

LOOSE PIECE

323158

QTY

PACKAGE TYPE

PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

MAX RECOMMENDED OPERATING
TEMPERATURE:
343°C [650°F]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DWN

100CT94

CHK

100CT94

M ELLIS

APVD

100CT94

S BORTNER

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME TERMINAL, RING TONGUE,
STRATO-THERM™, DIAMOND GRIP™
WIRE SIZE, 16-14 AWG

SIZE A3 CAGE CODE 00779 DRAWING NO C-323158

SCALE 6:1

SHEET 1 OF 1

REV D

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY


1-800-526-5142

VOLTAGE RATING:
-

CIRCULAR MIL AREA:
1.04mm²-2.62mm² [2050-5180]

STRANDED WIRE

DIMENSIONS:
mm [in]



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [0.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-

FINISH

BODY, NP, QQ-N-290

MATERIAL

BODY, CU PER ASTM B152

SLEEVE, NI SIL PER

ASTM B122