


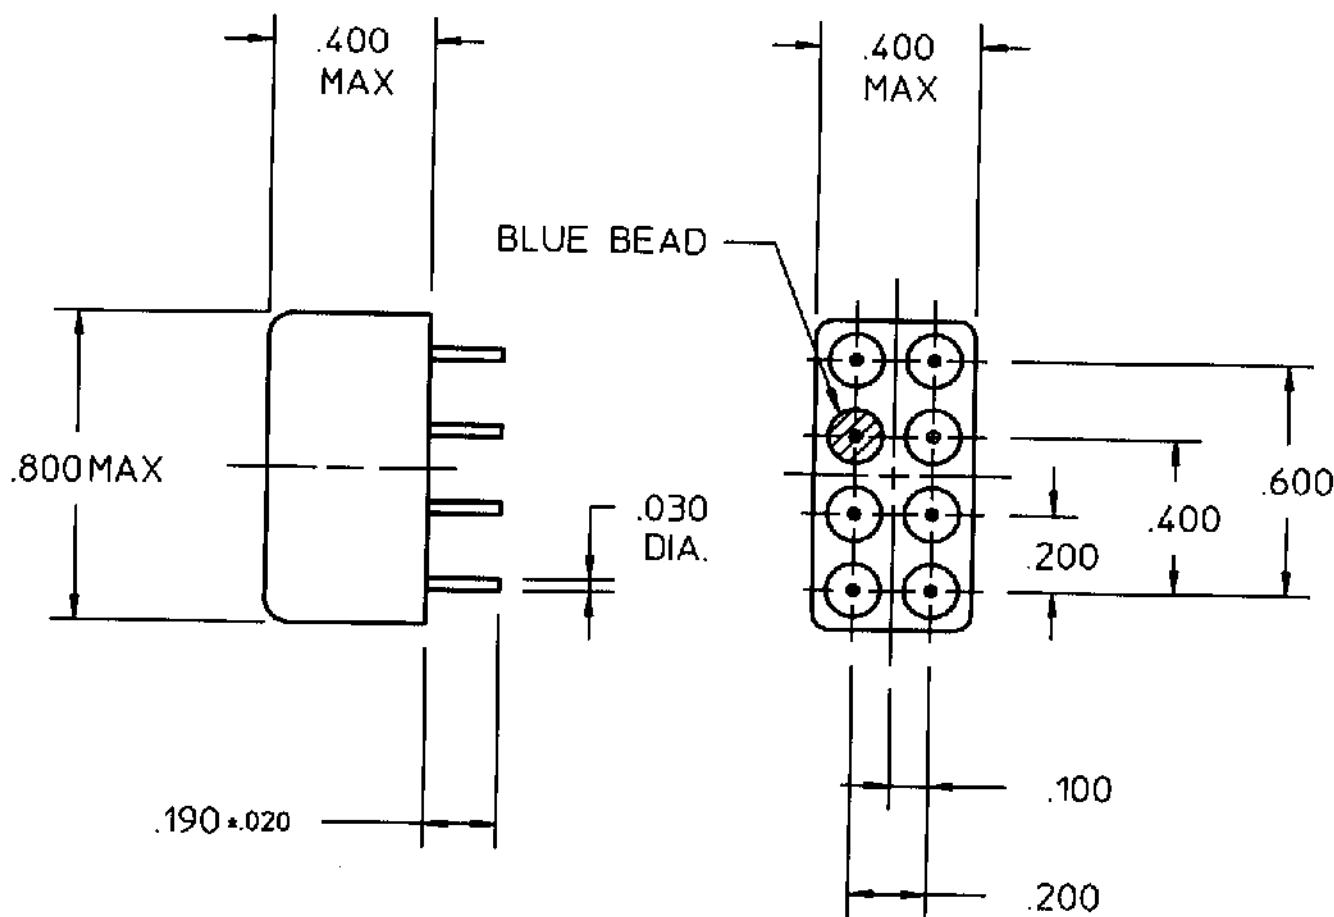


COIL: @ +25 °C
 RESISTANCE 440 OHMS ± 10%
 NOMINAL VOLTAGE 11.0-23 VDC
 MUST OPERATE 6.65 VDC
 MUST RELEASE 4.0 VDC MAX 0.66 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX
RELEASE 5 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

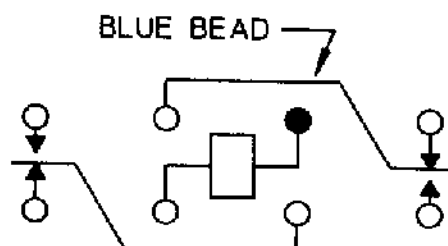

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/22/92 CK 12/22/92

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. GENICOM
 CUST. NO. 3SAV5004F2

TYPE "HMS" RELAY

HMS1201S48