
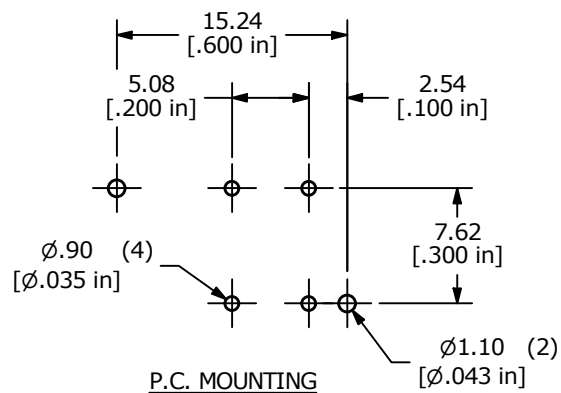
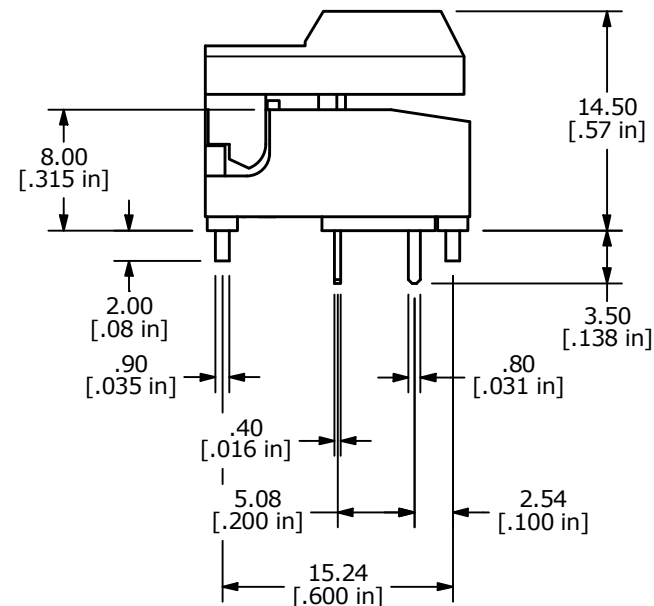
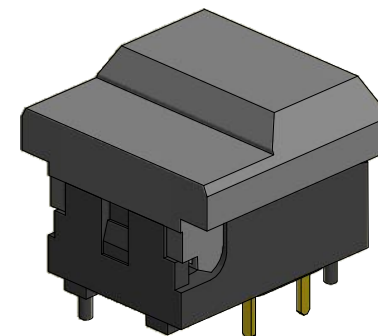
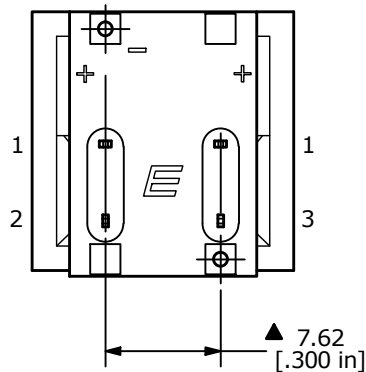
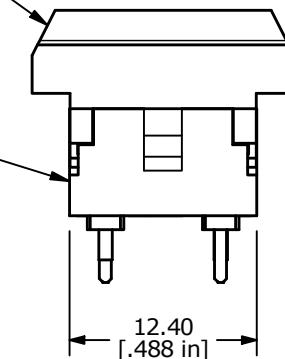


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. RATING: 30mA @ 12VDC
5. CONTACT RESISTANCE: 50m Ω MAX
6. INSULATION RESISTANCE: 50M Ω @ 500VDC
7. DIELECTRIC STRENGTH: 1,000 VAC @ 50/60 Hz FOR 1 min.
8. OPERATING FORCE: 150 $\pm$ 50gf
9. TRAVEL: 1.5 $\pm$ 0.3mm
10. MECHANICAL LIFE: 500,000 CYCLES
11. ELECTRICAL LIFE: 30,000 CYCLES
12. OPERATING TEMPERATURE: -25°C to 65°C
13. ▲ DENOTES CRITICAL PARAMETER

GRAY ACTUATOR
5511GRYX
(R040104)

5500STDBODYX
(R010000)

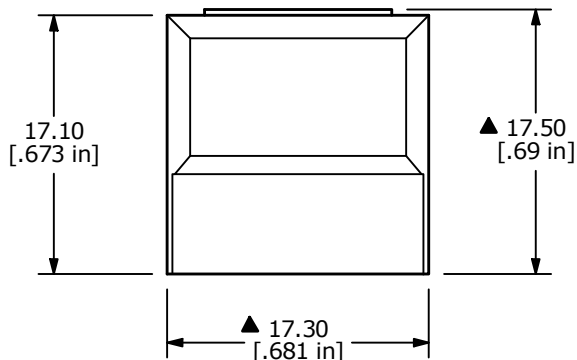

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101596	update PCB layout	02/02/23	MW	TITLE 5511MGRYX				000028394
					SCALE	DATE	DR	DWG	REV
					2:1	12/15/2005	PH	XR0243P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED