
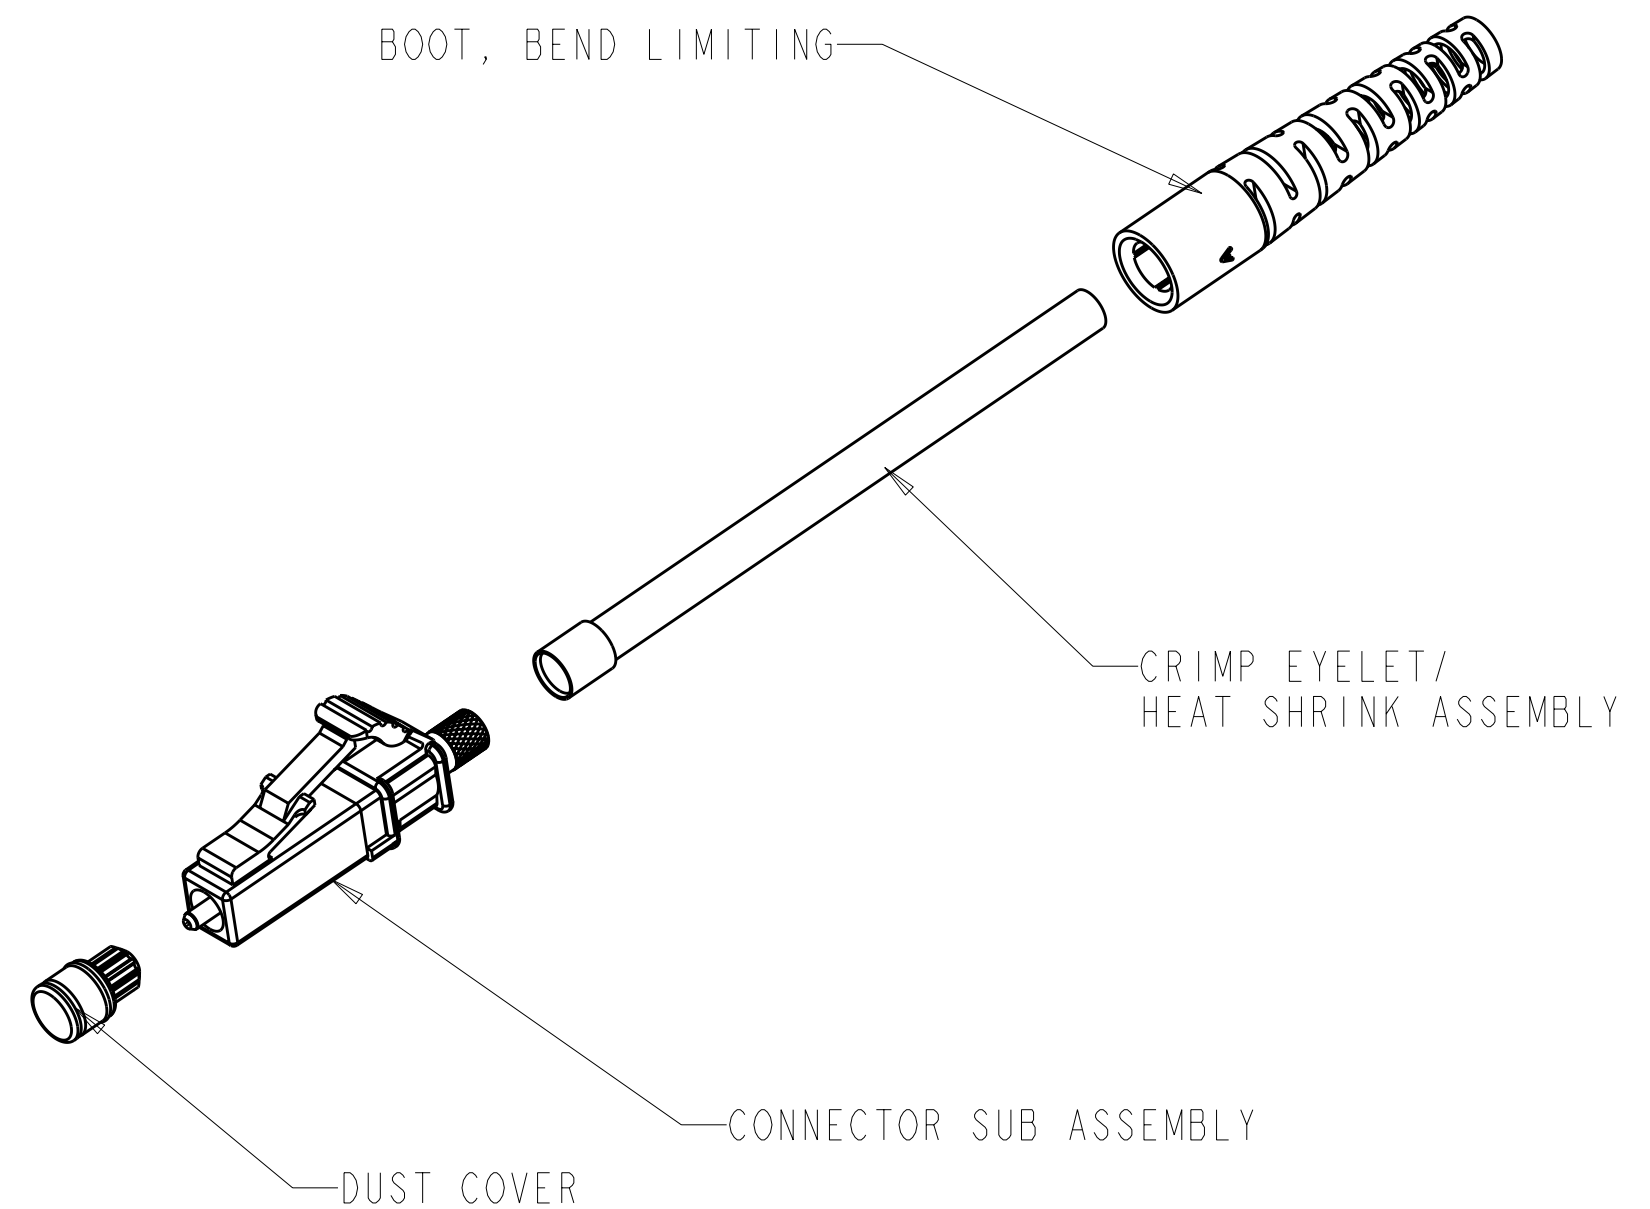
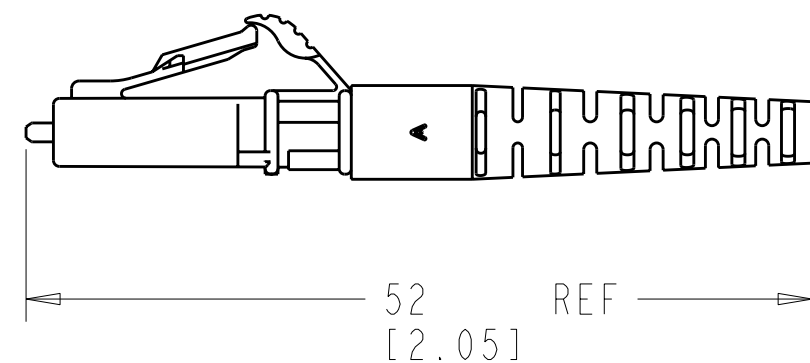


LOC	DIST	REVISIONS					
HG	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	ECO-07-016319	17JUL2007	DHR	DHR
			B	REV PER ECR-10-010066	20MAY2010	IL	CT


- △ MATERIAL: PROTECTIVE COVER: TPE, COLOR:BLACK, UL 94 HB. *
FERRULE SUB ASSEMBLY: ZIRCONIA/ALUM ALLOY.
COMPRESSION SPRING: STAINLESS STEEL.
FRONT HOUSING: PPSU, COLOR:BEIGE, UL 94 V-0. *
REAR BODY: ALUM ALLOY.
BOOT: PP, COLOR:BEIGE, UL 94 V-0. *
CRIMP EYELET/HEAT SHRINK ASSY: ALUM. ALLOY, HEAT SHRINK: POLYOLEFIN, UL VW-I.
*RATED AT QUALIFYING THICKNESS.

 BULK PACKAGED

3. THIS IS A NON-PULL PROOF LC CONNECTOR.
IT IS DESIGNED FOR USE WITH TIGHT CONSTRUCTION OPTICAL CABLE.
UNDER LOADS YOU MAY SEE ENDFACE ABRASIONS.

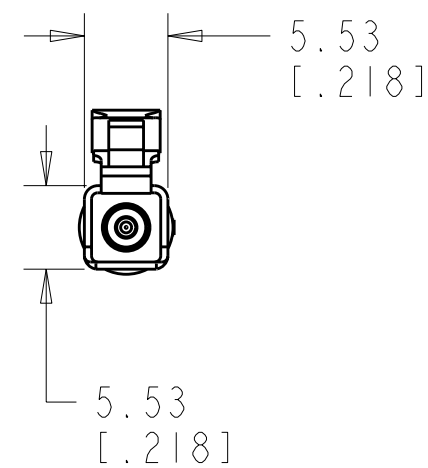

2	6828094-2
	6828094-1
	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN 140CT2005 F HALEY		 Tyco Electronics Tyco Electronics Corporation Shanghai, China					
DIMENSIONS: mm [INCHES]		CHK 140CT2005 D ROHDE							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 140CT2005 D ROHDE		NAME CONNECTOR KIT, LC, SIMPLEX MM, JUMPER, TIGHT JACKET STYLE, 1.6-2.0mm					
		PRODUCT SPEC -							
MATERIAL		APPLICATION SPEC -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		WEIGHT -		A2		C-6828094	-		
CUSTOMER DRAWING				SCALE	3.1	SHEET	1 OF 1	REV	B