

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING

6AT17

6AT17

M

DRAWING
NUMBER

ISSUE
X 6
X 5
X 3

REPLACES

RELEASE NO. SR 4510

CNT 13 MAY 55

CHECK

13 MAY 55

CHECK

13 MAY 55

CHECK

13 MAY 55

CHECK

16 MAY 55

CHECK

16 MAY 55

CHECK

12 MAY 55

CHECK


12 MAY 55

CHECK

N.C. TO C. CIRCUIT MADE
(MAINTAINED POSITION)

40°±8°
TOTAL
TRAVEL

N.O. TO C. CIRCUIT MADE
(MAINTAINED POSITION)

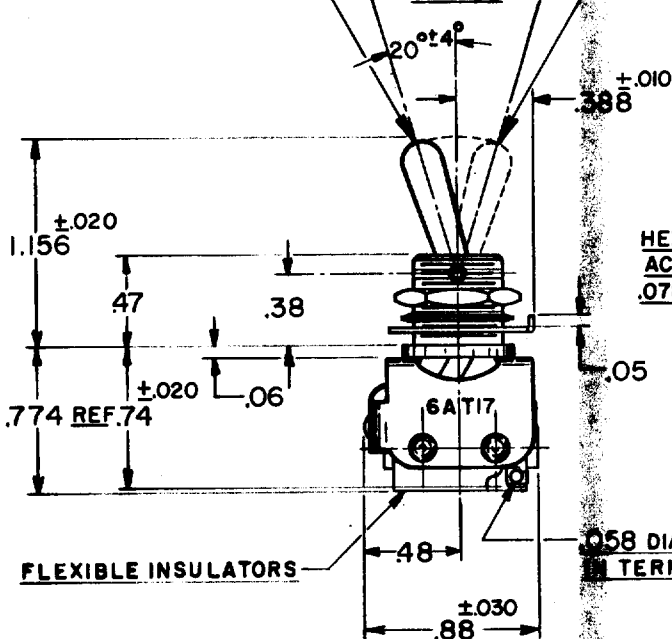

FLEXIBLE INSULATORS

.058 DIA. HOLE
IN TERMINALS.

.240 DIA.

.072 WIDE X .038 DEEP
KERF

15-32 NS THREAD TO
WITHIN .094 OF SHOULDER

CORROSION RESISTANT
BUSHING

CORROSION RESISTANT
INTERNAL TOOTH
LOCKWASHER .60 DIA.

CORROSION RESISTANT
STEEL KEYING WASHER
.031 THICK X .72 DIA,
TAB .110 WIDE,
.110 DIA.

3°

.37
.56 DIA

NOTE

1-UNIT INCLUDES (1) CAT. LIST. ISM23
BASIC SWITCH.

2-TERMINALS ARE PLATED FOR SOLDERING.

3-CONTACT MATERIAL SOLID GOLD.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

CONTACT ARRANGEMENT
S. P. D. T.

BREAK DISTANCE
.010 MIN.

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ± 1°

WEIGHT .05 LB.

(A)

DRAWN

W.H.B.

74-25