



DIMENSIONS

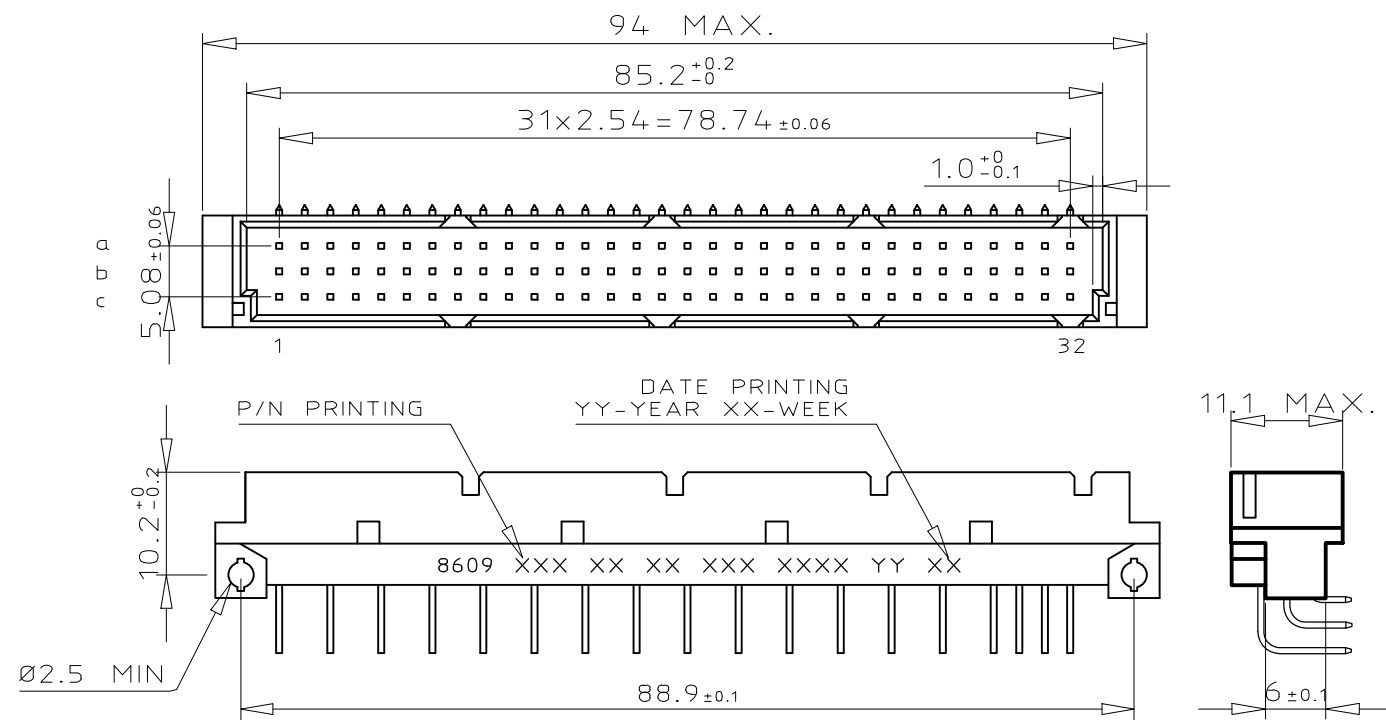

PCB LAYOUT

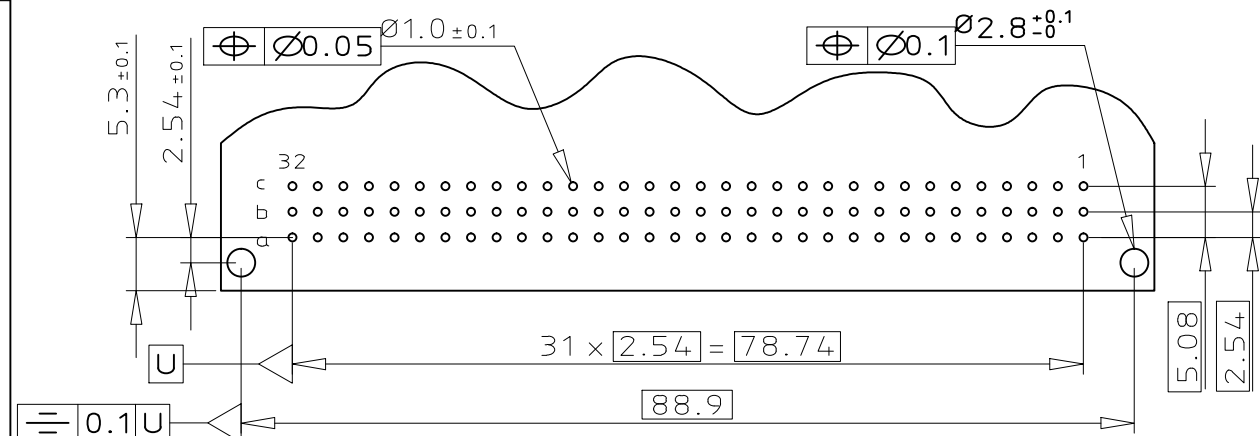


CONTACT ARRANGEMENT

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
c	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

☒ STANDARD CONTACT ☐ EMPTY CAVITY ☒ FMLB CONTACT ☐ LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO
REFER DRAWING C-8609-0000A

TERMINATION

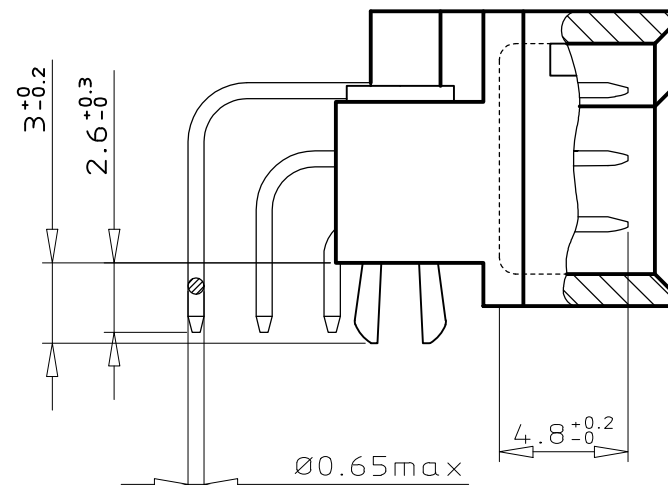

ORDERING INFORMATION

SERIES	8609	3	51	7	1	13	7	5	0	TSELF
ROWS FITTED WITH CONTACTS										
ROW a b c			3							
NO. OF CONTACTS			51							
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										7
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C										1
TERMINATION										
ANGLED SPILL										13
OPTIONS										
NO OPTION										7
WITH HARPOONS										H
PERFORMANCE CLASS										
DIN 41612 CLASS 3										4
DIN 41612 CLASS 2										5
DIN 41612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
MIXED PITCH										0
LEAD FREE VERSION SPL CONTACTS LOADING										TSELF

mat'l. code	surface	tolerance	projection	product family
SEE DRAWING C-8609-0000A	ISO 1302 ✓	ISO 406 ISO 1101		8609
ltr	ecn no	dr	date	title
A	109-0064	KR	2009-04-21	DIN STANDARD HEADER
B	111-0031	MJA	2011-02-11	ANGLED SPILL DIN 41612 STYLE C
				dwg no
				sheet 1 of 1
				size
				A3
				type
				Product Customer Drawing
sheet index	revision	B		
	sheet	1		