


RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.10mm

SPECIFICATION
MATERIAL & FINISHES
 INSULATOR: PBT GLASS FILLED UL94V-0
 CONTACT: BRASS
 SHELL : STEEL
 PLATING : CONTACT GOLD FLASH PLATED

ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C

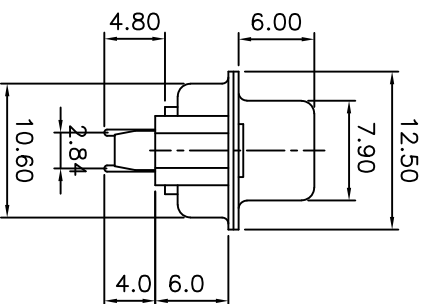

PARTS DIMENSION TABLE

parts no.	DIM. a	DIM. b	inner thread
F,G	5.0	10.0	4#40
H,J	4.8	11.8	4#40
I,K	5.8	12.0	4#40

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: DMSC-15S 二排 母头 直插 车针 柳合锁螺丝			
DRAWN:	DATE:	PART. NO.	D-DMSC15PF-F001		
LXF	2018-04-07	UNIT	mm	SCALE	Free
		FILE NO.	Ckmtw-DMSC-0007	REV.	A