
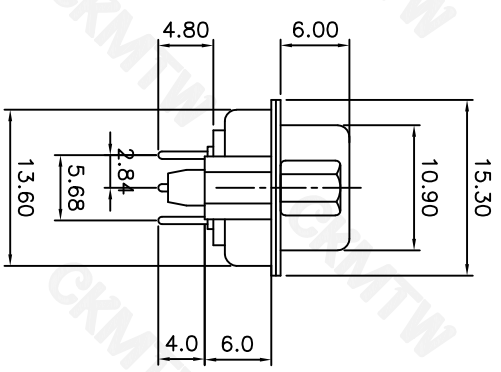


UNC 4#40*2


SPECIFICATION
MATERIAL & FINISHES
 INSULATOR: PBT GLASS FILLED UL94V-0
 CONTACT: BRASS
 SHELL : STEEL
 PLATING : CONTACT GOLD FLASH PLATED

ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C

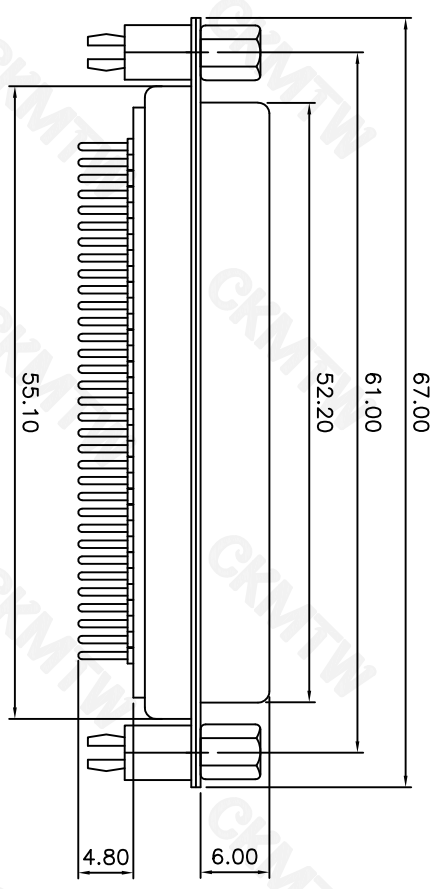

PARTS DIMENSION TABLE

| parts no. | DIM. a | DIM. b | inner thread |
|-----------|--------|--------|--------------|
| F,G | 5.0 | 10.0 | 4#40 |
| H,J | 4.8 | 11.8 | 4#40 |
| I,K | 5.8 | 12.0 | 4#40 |

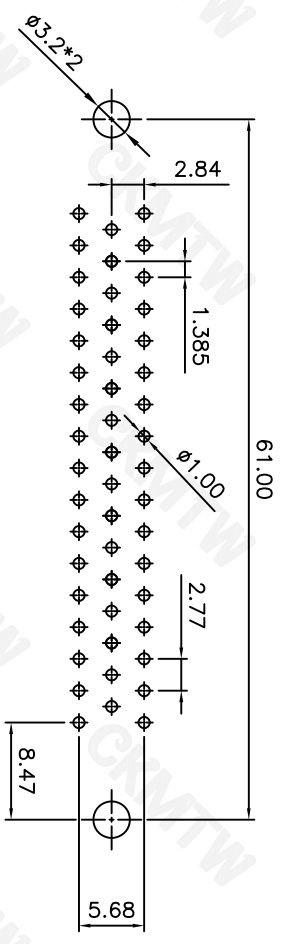

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
 TOLERANCES: ±0.10mm

TOLERANCE TABLE

| | |
|------|-------|
| .0 | ±0.30 |
| .00 | ±0.20 |
| .000 | ±0.05 |

| | | | | | |
|-----------|-----------------|---|------|------|---|
| APPROVED: | DATE: | Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD | | | |
| CHECKED: | DATE: | | | | |
| DRAWN: | DATE: | | | | |
| L.Y.F | 2018-04-07 | | | | |
| UNIT | mm | SCALE | Free | REV. | A |
| FILE NO. | Ckmtw-DMSC-0010 | | | | |