




SMT Gate Drive Transformers

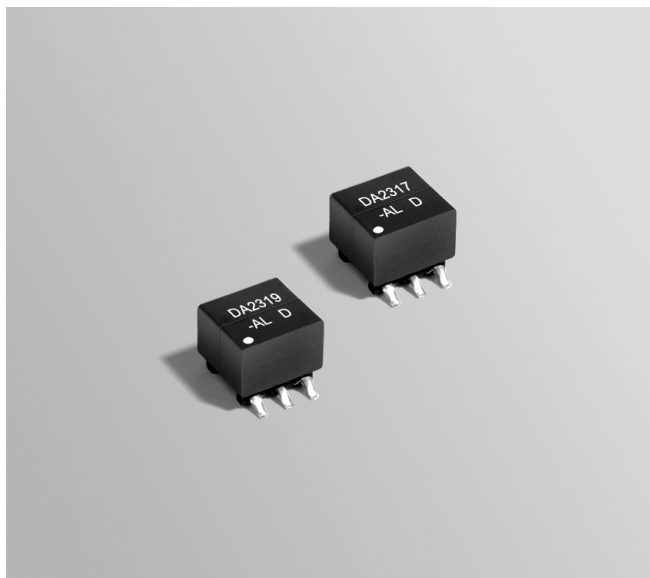

- Designed for high switching speed, transformer coupled MOSFET and IGBT gate drive circuits.
- Operating frequency: 50 kHz – 2.5 MHz
- 1250 VDC / 884 Vrms, one minute isolation between primary and secondary. 417 VDC / 295 Vrms, one minute isolation between secondaries on DA2317-AL and DA2320-AL.

Core material Ferrite

Terminations RoHS compliant tin-silver over tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 535 – 615 mg

Ambient temperature –40°C to +125°C

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.5 mm thick, 20 mm pocket spacing, 5.54 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

Part number ¹	Turns ratio	Pri L ² min (μH)	Leakage L ³ max (μH)	DCR max (Ohms)		Isolation ⁴ (VDC / Vrms)	Volt-time product (V-μsec)	SRF min ⁵ (MHz)	Capacitance Pri to Sec max (pF)
				Pri	Sec				
DA2320-AL_	1 : 1 : 1	264	0.3	1.5	1.50 (2-5; 3-4)	1250 / 884	24.5	2.5	95
DA2319-AL_	1 : 1	296	1.5	0.795	0.655	1250 / 884	25.8	1.75	14
DA2318-AL_	1.5 : 1	680	4.0	1.65	0.860	1250 / 884	40.8	1.25	14
DA2317-AL_	2 : 1 : 1	330	0.6	1.4	0.650 (2-5) 0.790 (3-4)	1250 / 884	24.5	2	18

1. When ordering, please specify **termination** and **packaging** codes:

DA2317-ALC

Termination: L = RoHS compliant tin-silver over tin over nickel over phos bronze

Special order, added cost:

S = non-RoHS tin-lead (63/37)

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (1000 parts per full reel).

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc

3. Leakage inductance measured at 100 kHz, 0.1 Vrms with secondary pins shorted.


4. 1250 VDC / 884 Vrms, one minute isolation (hipot) between primary and secondary. 417 VDC / 295 Vrms, one minute isolation (hipot) between secondaries on DA2317-AL and DA2320-AL.

5. SRF measured with coils connected in series using an Agilent/HP 4192 or equivalent.


6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

DA2318-AL, DA2319-AL



DA2317-AL, DA2320-AL





SMT Gate Drive Transformers - DA23xx

