



皓宇电子
HOOYA ELECTRONICS

Specification:


1. Rating : DC 20V 2.5A.
2. Contact resistance: $\leq 50m\Omega$.
After test: $\leq 100m\Omega$.
3. Insulation resistance: $\geq 100M\Omega$ (500VDC).
After test: $\geq 50M\Omega$.
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N-30N.
6. life test: 5000cycles min.
7. Operation temperature range: -20°C -70°C.
8. Preservative temperature range: -40°C -85°C.

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(BOTTOM VIEW)

电话 : 0769-82310511-867
邮箱 : hooya89@hooya.hk
V: hooya89

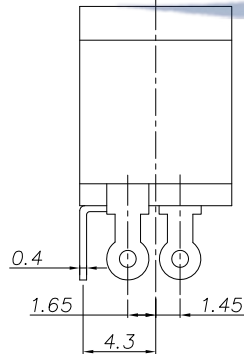

Model No.	✓		
PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$

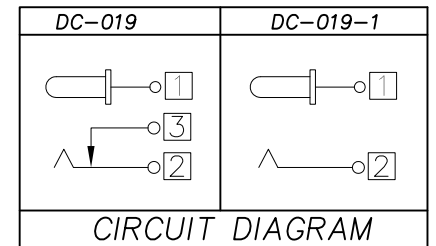

NO.	PART NAME	MATERIAL	QTY	FINISHING	TOLERANCE UNLESS SPECIFIED		NO	DATE	REVISIONS		BY	APPD
6	SHUNT TERMINAL [3]	BRASS	1	Sn-Plated	UP TO 5mm: ± 0.1	ANGULAR						
5	TIP SPRING [2]	STEEL	1	Sn-Plated	ABOVE 5mm: ± 0.2	$\pm 1^\circ$						
4	CENTER PIN TERMINAL [1]	BRASS	1	Sn-Plated	TITLE: DC JACK				UNIT :MM	ROHS COMPLIANT	DWN	
3	CENTER PIN [1]	BRASS	1	Ni-Plated	MODEL: DC-019-2.0				SCALE:1:1		CHK'D	
2	COVER	PBT	1	BLACK	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司						APPD	
1	HOUSING	PBT	1	BLACK								
PRO.AGL:												REV:A0