


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24
A2		更新产品尺寸	Chen HongJiang	Chen ZhiQiang	2025.10.17

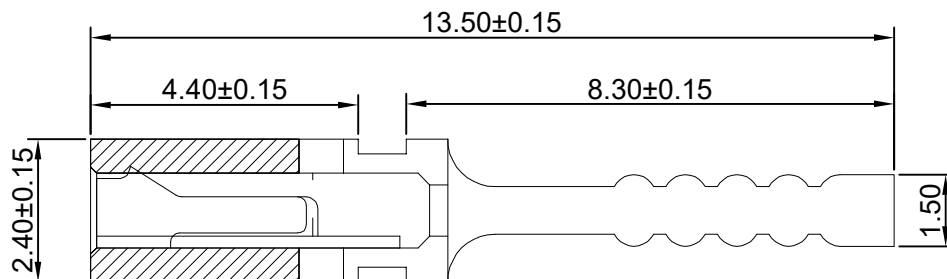


SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20mΩ Max.

Material:

Insulator Material: PBT (UL 94V-0) Black
 Contact Material: Phosphor Bronze
 Plating: Matte Tin or gold plated over Nickel

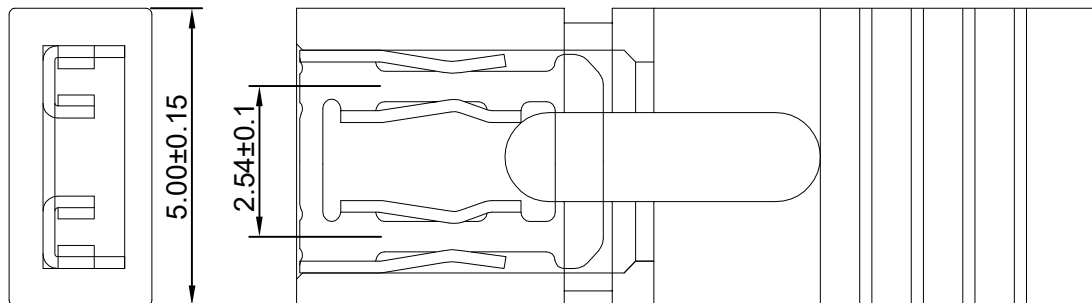

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO:		F254D-02-0135-PT-B		XFCN 兴飞连接器	
TITLE:		JUMP 2.54 塑高13.5 常开		0769-82001899	
				www.xfconn.com	
				DWG NO: /	
APPD	Chen ZhiQiang	VIEW			
CHKD	Liu Wei	SCALE	SHEET	REV	
DRAW	Chen HongJiang	NONE	1/1	A2	
DATE	2025.10.17				

8 7 6 5 4 3 2 1

E

D

C

B

A

E

D

C

B

A

8 7 6 5 4 3 2 1