


PAGE 1/1	ISSUE 04-06-13	SERIES LC	PART NUMBER F727751100
----------	----------------	-----------	------------------------

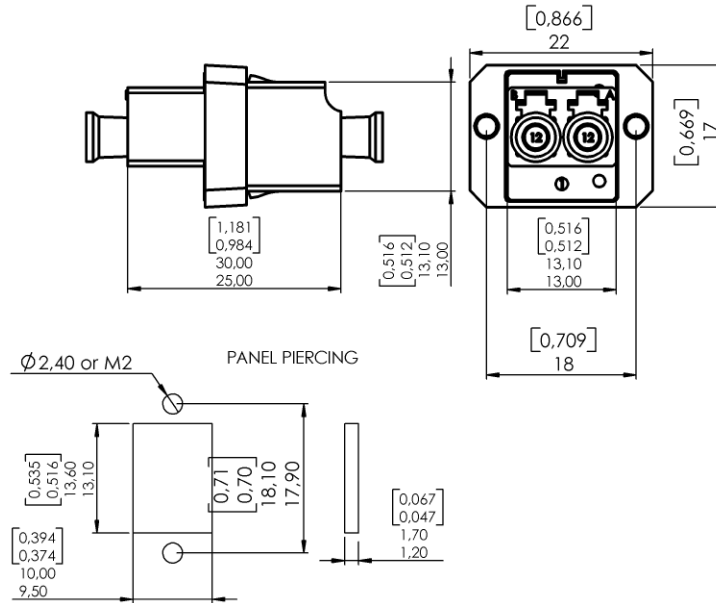

Dimensions: mm [inches]

**GENERAL**

**Type:** IEC 61754-20 (LC)

**Mounting:** SC panel cut-out screw in (max. panel thickness 1.7mm)

**Alignement Sleeve:** Zirconia

**Color:** GREEN

**CHARACTERISTICS** (Dependent on cable or fiber construction)

**Material:** Plastic molded : Material in accordance with TELCORDIA GR-326 CORE Inflammability V0 (UL 94)

**Mechanical:** Endurance : 200 matings  
Plug retention: 68N

**Environmental:** Storage temperature range: -40°C / +85°C  
Operating temperature range: -40°C / +70°C

**Proof test :** Straight pull: 68 N  
Side pull: 23 N

**Vibration test :** 10 to 55 Hz, 1,5 mm (peak to peak), 2 Hr/axis

(Performance and specification: see document GEN\_F727 001)