

LC DUPLEX PC SINGLEMODE ADAPTOR
 ZIRCONIA ALIGNMENT SLEEVE

Packaging
 100


Series
 LC

Issue
 03/26/04

Page
 1 / 2

Adaptor : color BLUE

Duplex

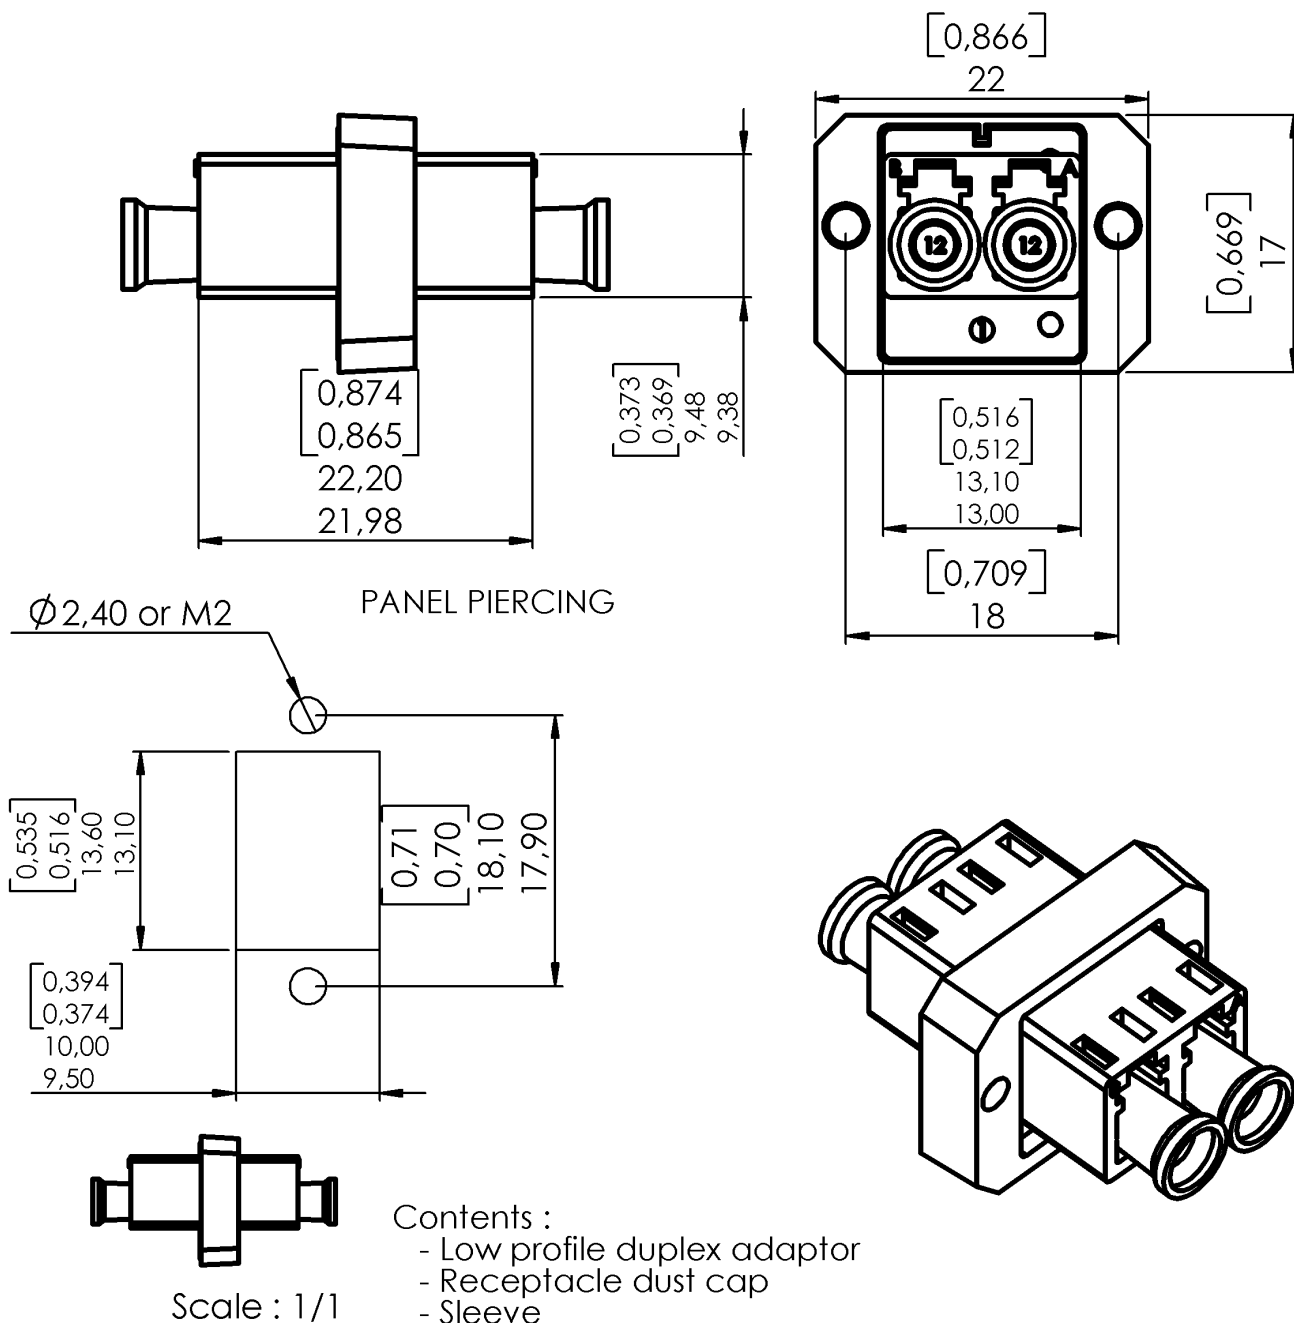

Original dimensions in mm [inch]

**LC DUPLEX PC SINGLEMODE ADAPTOR
ZIRCONIA ALIGNMENT SLEEVE**
**Packaging
100**
**Series
LC**
**Issue
03/26/04**
**Page
2 / 2**

Adaptor : color BLUE

Duplex

GENERAL

- ❑ **TYPE** IEC 61754-20 (LC)
RJ-45 latching system
Receptacle color : BLUE
- ❑ **MOUNTING** SC panel cut-out screw in
Max. panel thickness 1.7 mm
- ❑ **ALIGNMENT SLEEVE** Zirconia

CHARACTERISTICS (Depending on fibre or cable construction)

- ❑ **MATERIAL** Plastic molded : Material in accordance with TELCORDIA GR-326 CORE
Inflammability V0 (UL 94)
- ❑ **MECHANICAL**

Durability	200 cycles
Plug Retention	68 N
- ❑ **ENVIRONMENTAL**

Storage temperature range	-40 °C to +85 °C
Operating temperature range	-40 °C to +70 °C
- ❑ **PROOF TEST**

Straight pull	68 N
Side pull	23 N
- ❑ **VIBRATION TEST** 10 to 55 Hz, 1,5 mm (peak to peak), 2 Hr/axis

(Performance and specification : see document GEN - F727 001)