

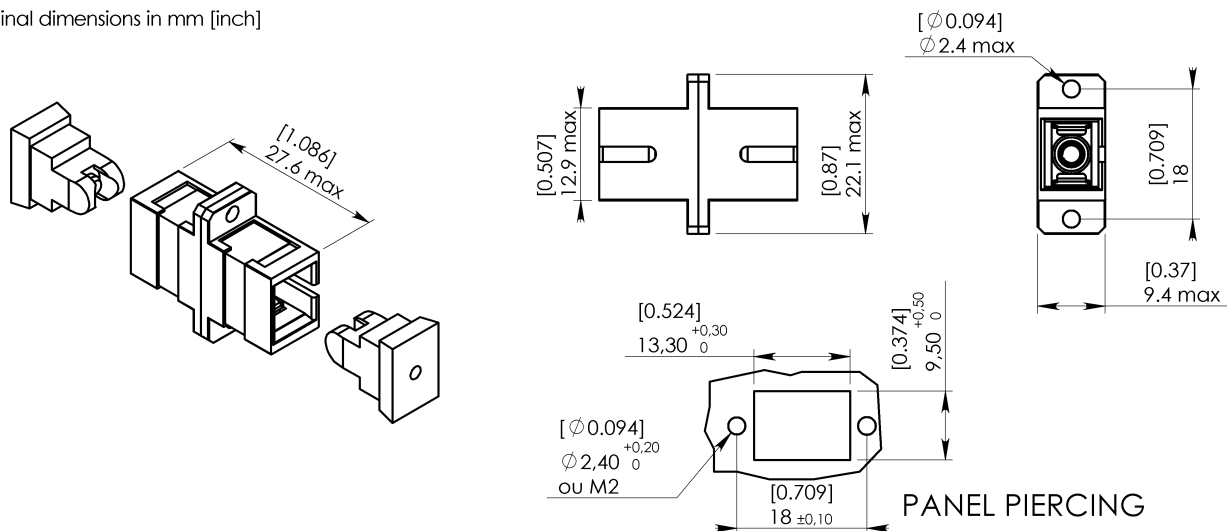
**SINGLEMODE SIMPLEX ADAPTOR – ZIRCONIA SLEEVE
ALIGNEMENT**
Series
SC

Packaging
1

Issue
4/01/2011

Page
1/1

Original dimensions in mm [inch]


GENERAL
Type : IEC 61754-4 SC type. Push pull latching system
Body color : blue

Mounting : Flange screw – in mounting

Alignment sleeve : Zirconia

CHARACTERISTICS (Dependant on fiber or cable construction)

Material : Plastic moulded

 Material in accordance with BELLCORE GR 326
CORE Issue 2, par.3.3.1
Inflammability V1 (UL94)

Optical : Attenuation (according to IEC 61300-3-4:Substitution method, 7 type) at 1310nm :
0.25 dB Max / 0.07 dB Typ

Mechanical : Durability Bellcore 326, 500 cycles
Plug Retention > 68 N

Environmental : Temperature range (storage/operating) -40°C to +85°C

Salt spray : EIA/TIA -455-16A, 35°C, 168 hr.

Vibration test : Bellcore 326, 10 to 50 Hz, 2 hrs./axis

Proof test : Bellcore 326, Straight pull : 6.8 Kg load at 0°
Side pull : 3.5 Kg load at 90°

CREATION					RADIAL 101, rue P. Hoffmann 93116 ROSNY/BOIS FRANCE Tel : (33) 0149353535 Fax : (33) 0148546363
PEN/EP CAT					
Name: CAUSSE.C	4Jan 11	Mise à jour des performances mécaniques	Poret	HD	
Date: 23 jul 99	10 jan02	Performance specified	Valencia	LV	
Appr.: LV	Issue	Revisions	Name	Appr.	