


 RADIALL Optical fiber components	TECHNICAL DATA SHEET		series F728	Issue 09 Jan.02	Page 1/1
SC	APC SIMPLEX ADAPTOR	Packaging : 1	F 7 2 8 7 0 3 1 0 0		
	ZIRCONIA ALIGNEMENT SLEEVE	Packaging : 100	F 7 2 8 7 1 3 1 0 0		

Original dimensions in mm [inch]

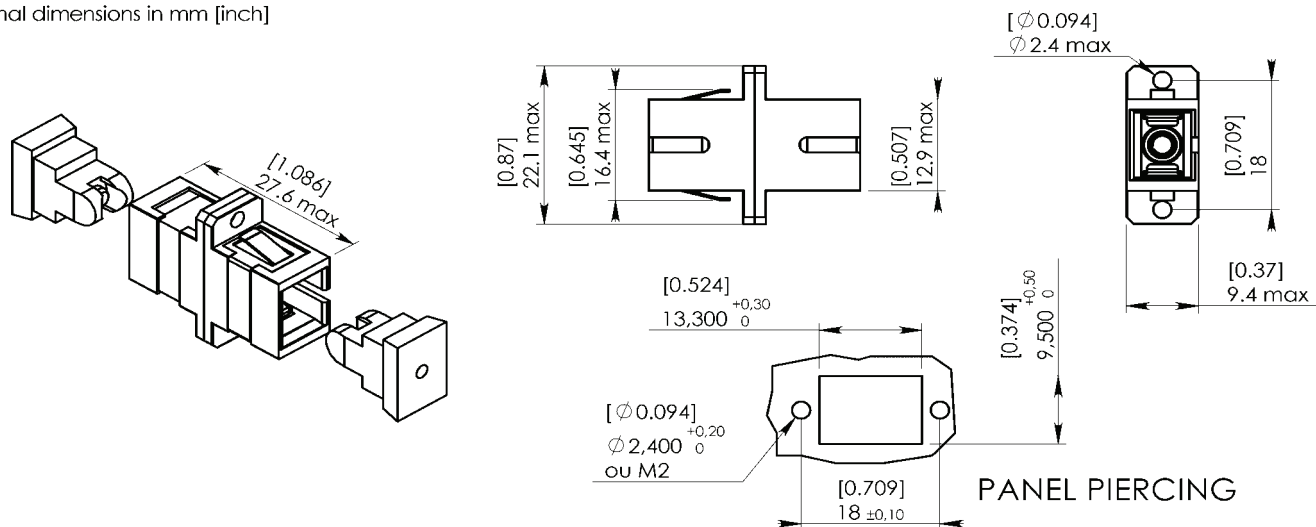

GENERAL

Type	: IEC 61754-4 SC type. Push-pull latching system Body color : green	
Mounting	: snap-in (or screw - in) mounting	max. panel thickness 1,6 mm
Alignment sleeve	: zirconia	

CHARACTERISTICS *(Dependant on fiber or cable construction)*

Material	: Plastic moulded		Material in accordance with BELLCORE GR 326 CORE Issue 2, par. 3.3.1 Inflammability V1 (UL94) stainless steel		
	Clip				
Optical	: Attenuation (according to IEC 1300-3-4:Substitution method, 7 type) at 1310nm :		0,11	dB	Max
			0,05	dB	Typ
Mechanical	: Durability Plug Retention		Bellcore 326, 200 cycles > 68N		
Environmental	: Temperature range (storage/operating)		-40°C to +85°C / -40°C to +70°C		
Salt spray	:		EIA/TIA-455-16A, 35°C, 168 hr.		
Vibration test	:		Bellcore 326, 10 to 50 Hz, 2 hrs./axis		
Proof test	:		Bellcore 326, Straight pull : 6,8Kg load at 0° Side pull : 3,5 Kg load at 90°		

CREATION					
N° : 0					
PEN/EP : CAT.					
Name : CAUSSE C.					
Date : 23 Jul.99	01/09/02	performance specified		VALENCIA	
App. : L V	Issue	Revisions		Name	App.

RADIALL

101, rue P. Hoffmann - Z.I. Ouest
93116 ROSNY / BOIS Cedex-France

Phone : (0033) 149353535
Fax : (0033) 48546363