

FEATURES

- High efficiency, low output ripple and noise
- Super wide voltage input 4:1
- No external element required
- Continuous short circuit protection and self-recovery
- Operating temperature range: -40 ~ +85
- Isolation Voltage: 1500VDC
- Metal shield package
- High Reliability (MTTF ≥ 100 ten thousand hours)
- International standard pin mode
- 100% full load aging



RoHS
Isolate/Stabilize
Super wide voltage input

PRODUCT MODEL LIST

Order Code	Nominal Input Voltage (V)			Nominal Output Voltage			Efficiency (%)		Capacitive Load [Max] (uF)
	Nominal	Range	Max	Voltage (V)	Current (mA)		Min	Typ	
					Min	Max			
J06W24D05A	24	9~36	40	±5	0	±600	80	82	3300
J06W24D09A				±9	0	±333	82	84	1000
J06W24D12A				±12	0	±250	83	85	680
J06W24D15A				±15	0	±200	84	86	470
J06W24D24A				±24	0	±125	84	86	220
J06W24S05A				5	0	1200	81	83	4700
J06W24S09A				9	0	667	82	84	3300
J06W24S12A				12	0	500	83	85	1000
J06W24S15A				15	0	400	84	86	680
J06W24S24A				24	0	250	84	86	470
J06W48D05A	48	18~72	75	±5	0	±600	81	83	3300
J06W48D09A				±9	0	±333	82	84	1000
J06W48D12A				±12	0	±250	84	86	680
J06W48D15A				±15	0	±200	84	86	470
J06W48D24A				±24	0	±125	85	87	220
J06W48S05A				5	0	1200	81	83	4700
J06W48S09A				9	0	667	82	84	3300
J06W48S12A				12	0	500	84	86	1000
J06W48S15A				15	0	400	84	86	680
J06W48S24A				24	0	250	85	87	470

Ps : *The positive and negative output capacitive loads are the same.

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Power		0		6	W
Output Positive Voltage Accuracy			±1	±2	%
Output Negative Voltage Accuracy			±2	±3	
Line Voltage Regulation	Full load, input voltage change from low to high		±0.2	±0.5	%
Load Regulation	Load varies from 5% to 100% at nominal input		±0.5	±1	
Temps Drift Coefficient	Rated load			±0.03	%/
Ripple & Noise	At 20MHz bandwidth		50	100	mVp-p
Switching Frequency	Rated input voltage		320	350	KHz

All Specifications Subject To Change Without Notice

OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Output Short Circuit Protection	Sustainable and automatic restoration				
Input Filter	π -type filtering				
Hot Plug	Nonsupport				


INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Input Undervoltage Protection	Input 24VDC	6.6	7.3		VDC
	Input 48VDC	13.5	14.8		
Starting Voltage	Input 24VDC		8.2	9	
	Input 48VDC		16.2	18	
Impulse Voltage (1sec. max)	Input 24VDC	-0.7		50	
	Input 48VDC			100	
No-load Current	Input 24VDC		4	7	mA
	Input 48VDC		3	5	

EMC CHARACTERISTICS				
EMI	CE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)		
	RE	CISPR32/EN55032 CLASS B (see EMI recommended circuit)		
EMS	ESD	IEC/EN61000 - 4 - 2 CONTACT \pm 4KV		perf. Criteria B
	RS	IEC/EN61000 - 4 - 3 10V/M		perf. Criteria A
	EFT	IEC/EN61000 - 4 - 4 \pm 2KV (see EMS recommended circuit)		perf. Criteria B
	Surge	IEC/EN61000 - 4 - 5 LINE TO LINE \pm 2KV (see EMS recommended circuit)		perf. Criteria B
	CS	IEC/EN61000 - 4 - 6 3 VR.M.S		perf. Criteria A
	Voltage sag, drop and short - time interrupt immunity	IEC/EN61000 - 4 - 29 0% , 70%		perf. Criteria B


Insulation Characteristic					
Parameter	Conditions	Min.	Typ.	Max.	Units
Insulation Resistance	Input- output, 500VDC	1000			M
Insulation Voltage	Input- output, test time 1 minute, leakage current less than 1 mA	1500			VDC
	Input、 output-shell, test time 1 minute, leakage current less than 1 mA	1000			

General Characteristic					
Parameter	Conditions	Min.	Typ.	Max.	Units
Storage Humidity		5		95	%
Operating Temps		-40		85	
Storage Temps		-55		125	
Operating Case Temps			25	30	
Pin Welding Temps	Welding joint 1.5mm from case,10 seconds operation			300	
MTTF	MIL - HDBK - 217@25	100			
Weight			12		g
Cooling	Free air convection				
Case Material	Black metal shell				

Temps Curve



Shape & Pin Dimensions

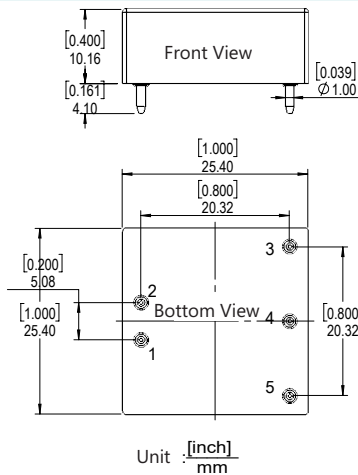


Pin	Single	Double
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	NP	0V
5	0V	-Vo


ps:
 NP: no pin
 Terminal Spec.: 1.0
 Unit: MM
 Terminal section tolerance: $\pm 0.10 [\pm 0.004]$
 Unmarked tolerance: $\pm 0.50 [\pm 0.020]$

PCB


[0.1inch]2.54mm square grid



Package Dimensions



EMC 推荐电路

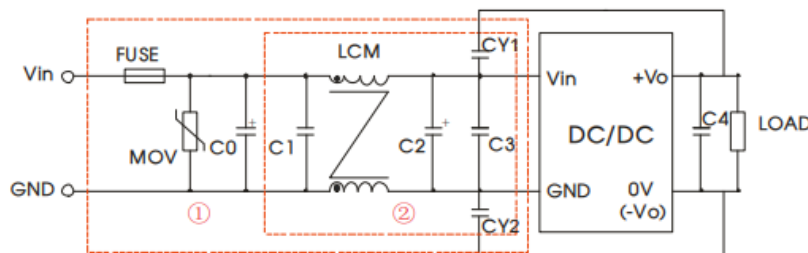

Notes : The first red frame is for EMS test, the second red frame is for EMI test. Select as needed.


INPUT	FUSE	MOV	C0	C1	C2	C3	C4	LCM	CY1、CY2
24VDC	See remarks	20D470K	680uF/50V	1uF/50V	330uF/50V	4.7uF/50V	See remarks	4.7mH	1nF/2kV
48VDC		14D101K	680uF/100V	1uF/100V	330uF/100V	4.7uF/100V			

Notes :

FUSE: selection is according to customer's actual input current

C4: refer to the output parameters in the application circuit.

Basic Application Circuit

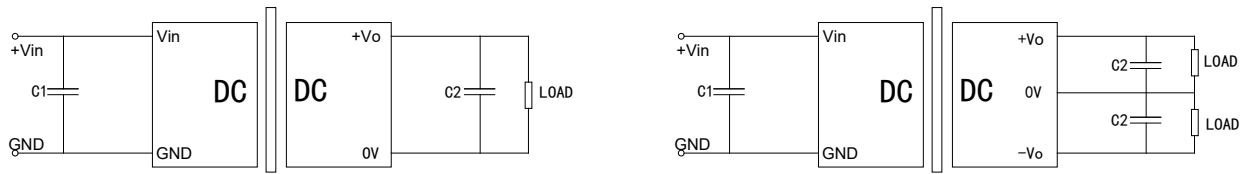

Options of C1、C2:


Input Voltage	External Capacitance C1	Single Output Voltage	External Capacitance C2	Double Output Voltage	External Capacitance C2
--	--	5VDC	10uF/16V	± 5VDC	10uF/16V
--	--	9VDC	10uF/16V	± 9VDC	10uF/16V
24VDC	100uF/50V	12/15VDC	10uF/25V	± 12/ ± 15VDC	10uF/25V
48VDC	47uF/100V	24VDC	10uF/50V	± 24VDC	10uF/50V

Note

Avoid Excessive Output External Capacitance: The capacity value of the output external capacitor C2 should not be too large, otherwise it is easy to cause overcurrent or bad startup when the module is started. The specific value should be selected according to the external capacitor table.

The input of this series does not support parallel use of hot plug and output.

For situations requiring high ripple noise, external LC filter circuit should be connected, and the resonant frequency of LC filter should be far less than the switching frequency of DC/DC module to prevent mutual interference, resulting in output ripple increase or module damage, as shown in the figure:

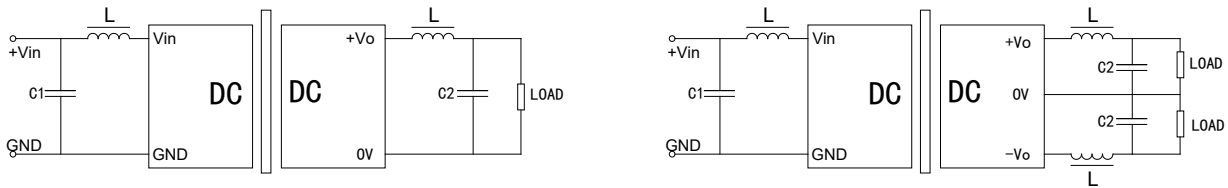

Naming Logic Of Constant Voltage Products

