


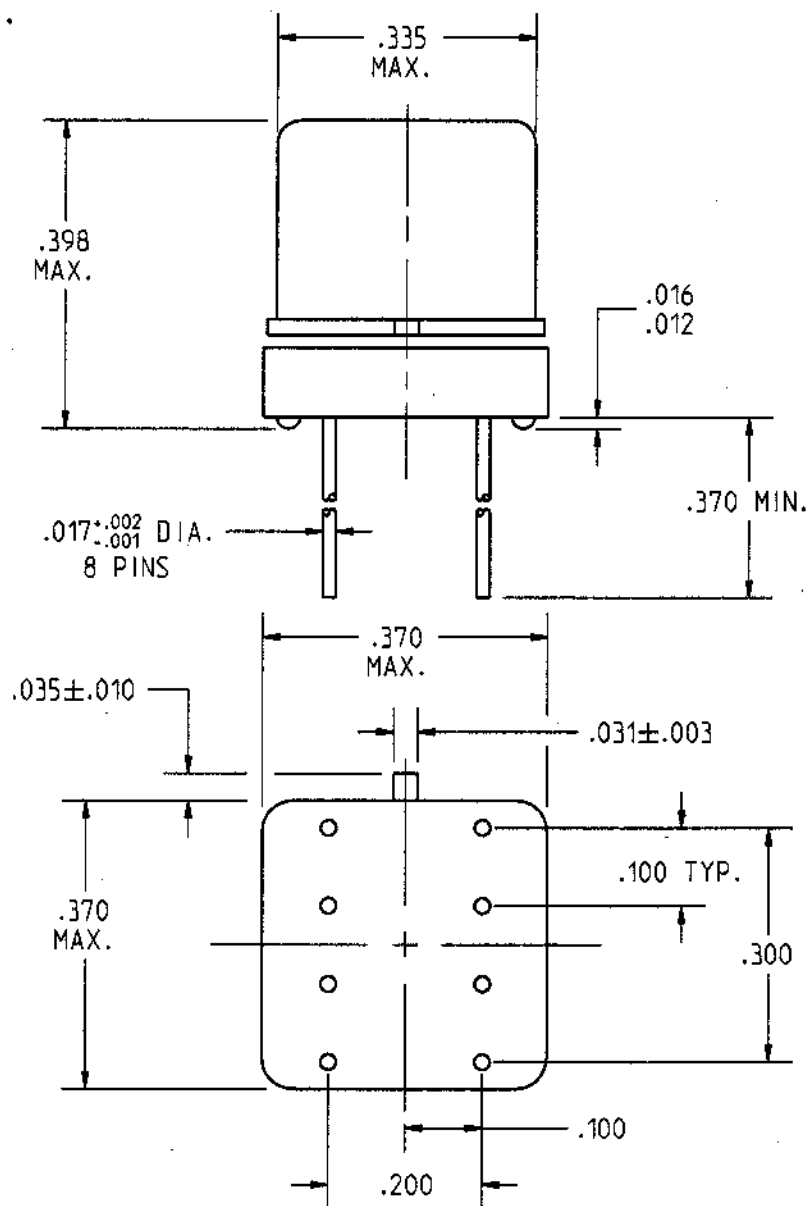

REV. 0
DCO 143832


COIL: @ 25°C
RESISTANCE 880 OHMS ±10%
NOMINAL VOLTAGE 18.0 VDC
MUST OPERATE 10.6 VDC
MUST RELEASE 6.0 VDC MAX, 0.91 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 14NOV03

CR. ERRA 11/13/03

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/15-104L REV.

"JMACD" RELAY

JMACD-18XLS