


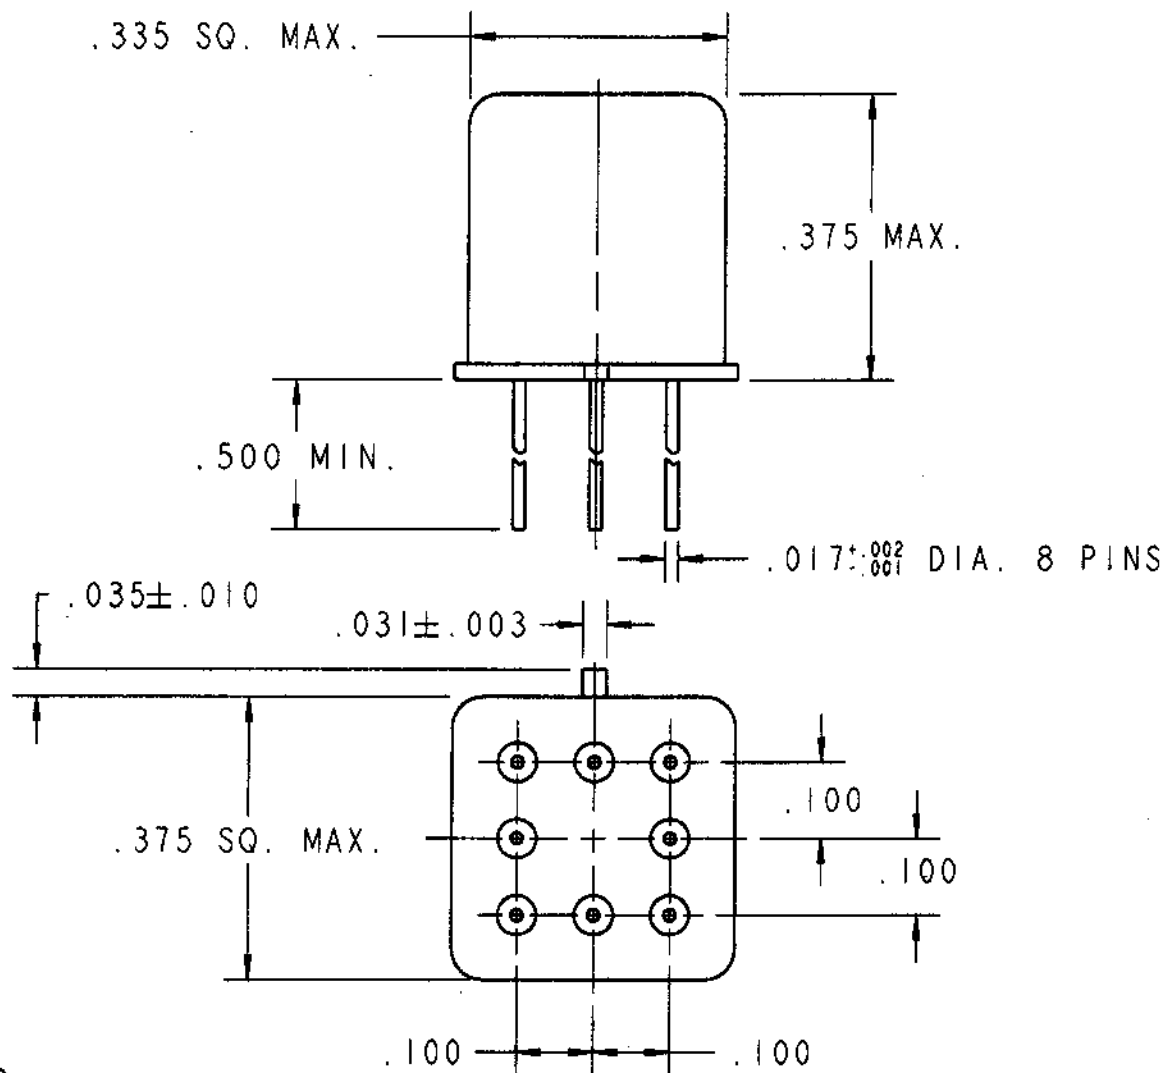

REV. 0

DCO 142932

COIL: @ 25°C

RESISTANCE 3200 OHMS $\pm$ 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 15.2 VDC

MUST RELEASE 10.8 VDC MAX, 1.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX

RELEASE TIME 7.5 MS MAX

CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. PBB 5/14/01

CK *[Signature]* 5/14/01

CII Technologies
advanced control electronic solutions

CUST. OPL

CUST. NO. M39016/43-038P REV.

"JMGSCDD" RELAY

JMGSCDD-26P