


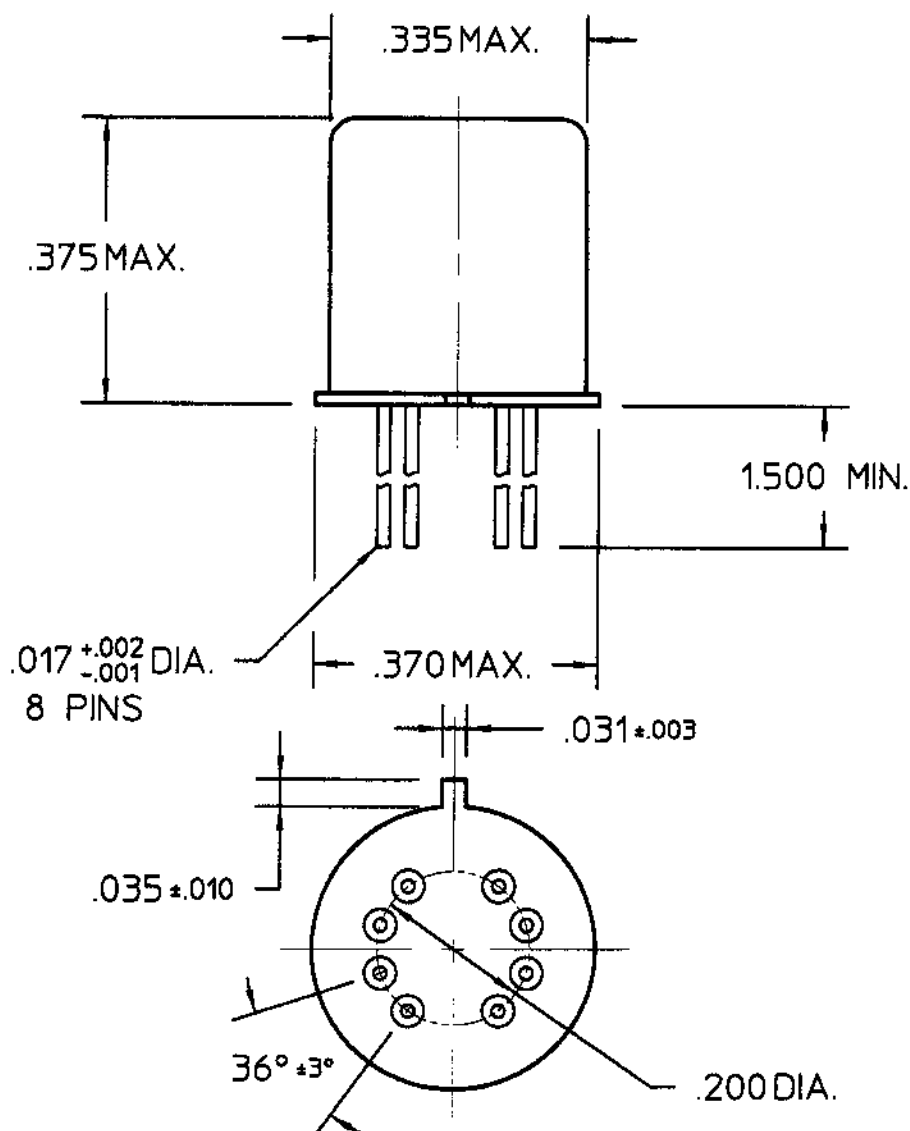

REV. 0
DCO 142821

COIL: @ 25°C
RESISTANCE 100 OHMS $\pm$ 10%
NOMINAL VOLTAGE 5.0 VDC
MUST OPERATE 2.6 VDC

MUST RELEASE 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX

RELEASE TIME 7.5 MS MAX

CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/15/01

PK. Jerry C 3/15/01

ICH Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/16-017P REV.

"JMSD" RELAY

JMSWD-5XP