
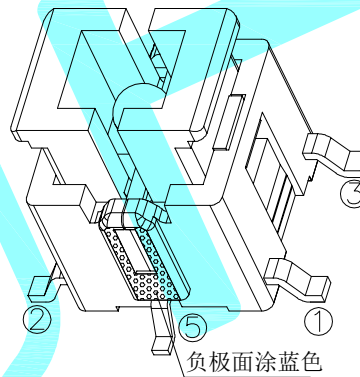


Circuit Diagram

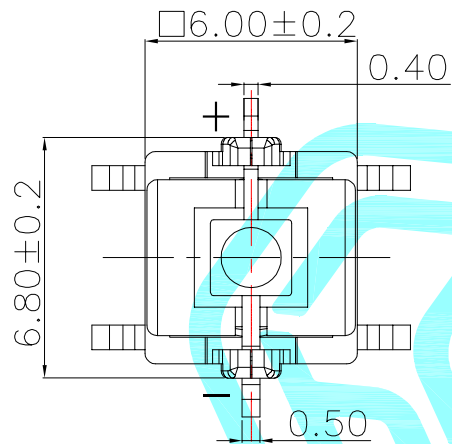

- NOTES:
 1.RATING: 12VDC 50mA
 2.CONTACT RESISTANCE: 100mΩ Max
 3.INSULATION RESISTANCE: 100MΩ 250VAC FOR 1MIN
 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
 5.LIFE TEST:100,000 CYCLES
 6.OPERATION FORCE:250±50GF
 7.TRAVEL:0.25±0.1mm

LED colour(LED颜色)	Part No. (料号)
Whiter(白色)	K6-6140S-01
Red(红色)	K6-6140S-02
Blue(蓝色)	K6-6140S-03
Green(普绿)	K6-6140S-04
Yellow(黄色)	K6-6140S-05
Orange(橙色)	K6-6140S-06

②	Terminal	3	Brass	Ag Plating		
①	Housing	1	PPA	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN	LIUCAN	2021.6.5				
CHECKED				TITLE:	LED Tact Switch	
APPROVALS				PART NO.	K6-6140S	
TOLERANCES ARE		30~以上 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
		10~30 ±0.20	±2'	DRAWING NO.		SHEET 1 OF 1
		5~10 ±0.15				
		~ 5 ±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			