

4

3

2

1

D

D

C


C

B

E


A

A



NOTES:

- 1. Rating : 16A GP 125/250VAC 5E4 40T125  
16(4)A 125/250VAC 5E4 40T125  
16A 42VDC 5E4 40T125
- 2. Contact resistance : 50mΩ Max
- 3. Insulation resistance : >100MΩ (Min) 500VDC
- 4. Dielectric strength : >1500VAC 0.5mA 1 minutes

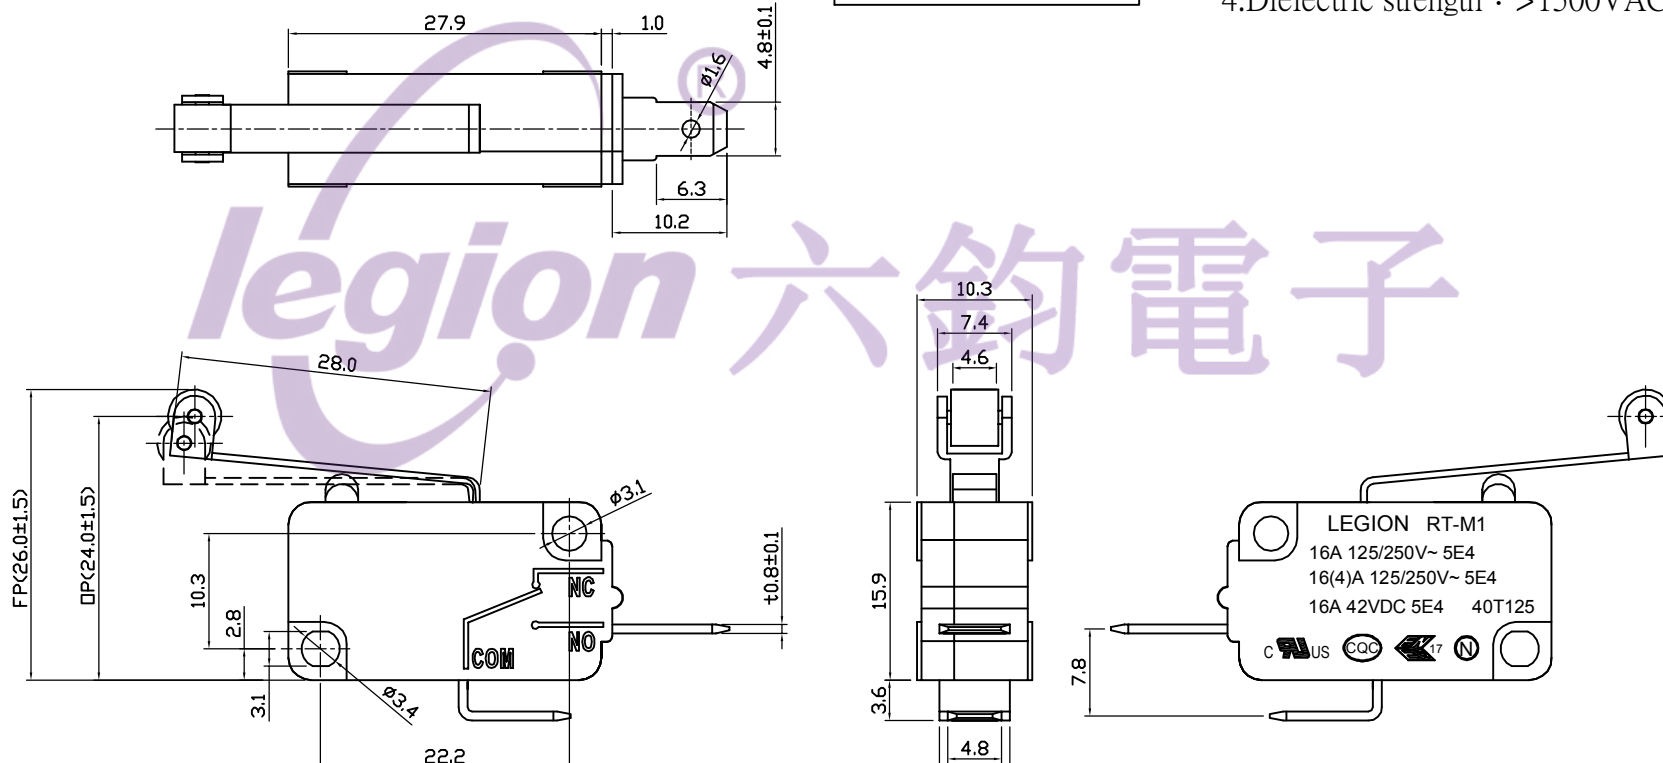

legion 六鈎電子

电话：0769-82310511-867

邮箱：hooya89@hooya.hk

5		10		DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM			
4		9		RANGE	TOLERANCE				LMC	SCALE	NO			
3		8		X	±0.30				2019. 05. 15	MAT'L	***			
2		7		X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.	
1		6		X.XX	±0.10							RT-M1-7C3B16C050	WIF119098	A
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1'	LEGION ELECTRONIC & HARDWARE CO., LTD.								

4

3

2

1