
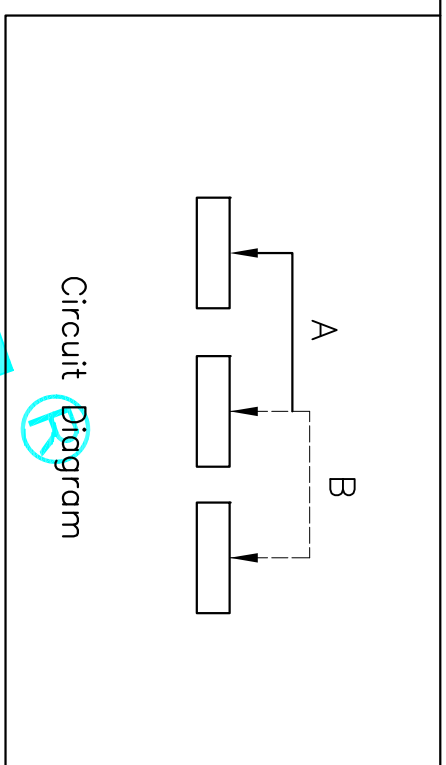


X	
PART NO	vigor
2	G2
3	G3
4	G4
5	G5
6	G6
7	G7
8	G8
9	G9
10	G10

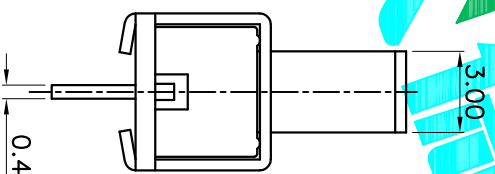

Specification:
 1. Rating: DC 30V 50mA
 2. Travel: 2.5±0.1mm
 3. Operating Force: A-B 150gf±75gf
 B-A 150gf±75gf
 4. Contact Resistance: 100mΩ Max
 5. Life: 10,000 Cycles Min

⑥	Contact	1	Phosphor Bronze	Ag Plated
⑤	Spring	1	Steel Wire	Temper
④	Terminal	3	Brass Strip	Ag Plated
③	Base	1	Phenolic Resin	Natural
②	Frame	1	Spcc	Black
①	Knob	1	POM	Black
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	DRAWING NO.	
DRAWN	G.M.Chen	2024/11/11	SS-12F20-G	
CHECKED			VERTICAL SLIDE SWITCHES	
APPROVALS			PART NO. SS-12F20-G	
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE
		10 ^{±0.20}	±0.20	UNIT: mm
		5 ^{±0.10}	±0.10	SCALE: 1:1
		~5	±0.10	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
	A		NEW	CHECK.
				APPRO.

DEALON 德之隆
 ELECTRONICS CO., LTD