


REVISION			
LTR	DESCRIPTION	DATE	APP
A0	NEW RELEASE	05/20/2020	PECK

技术参数/Specifications		
额定参数/Rating	0.3A 36VDC	
环境温度/Environment Temperature	-25°C ~ 85°C	
接触电阻 Contact Resistance	≤ 50mΩ	
绝缘电阻/Insulation Resistance	≥ 100MΩ (at 500VDC)	
耐电压 Withstand Voltage	针脚-针脚 Terminal-Terminal	500V AC/10mA/5s
	针脚-手柄 Terminal-knob	1500V AC/10mA/5s
电气寿命 Electrical life	10000 Cycles	
操作力 Operating Force	1N ~ 3N	

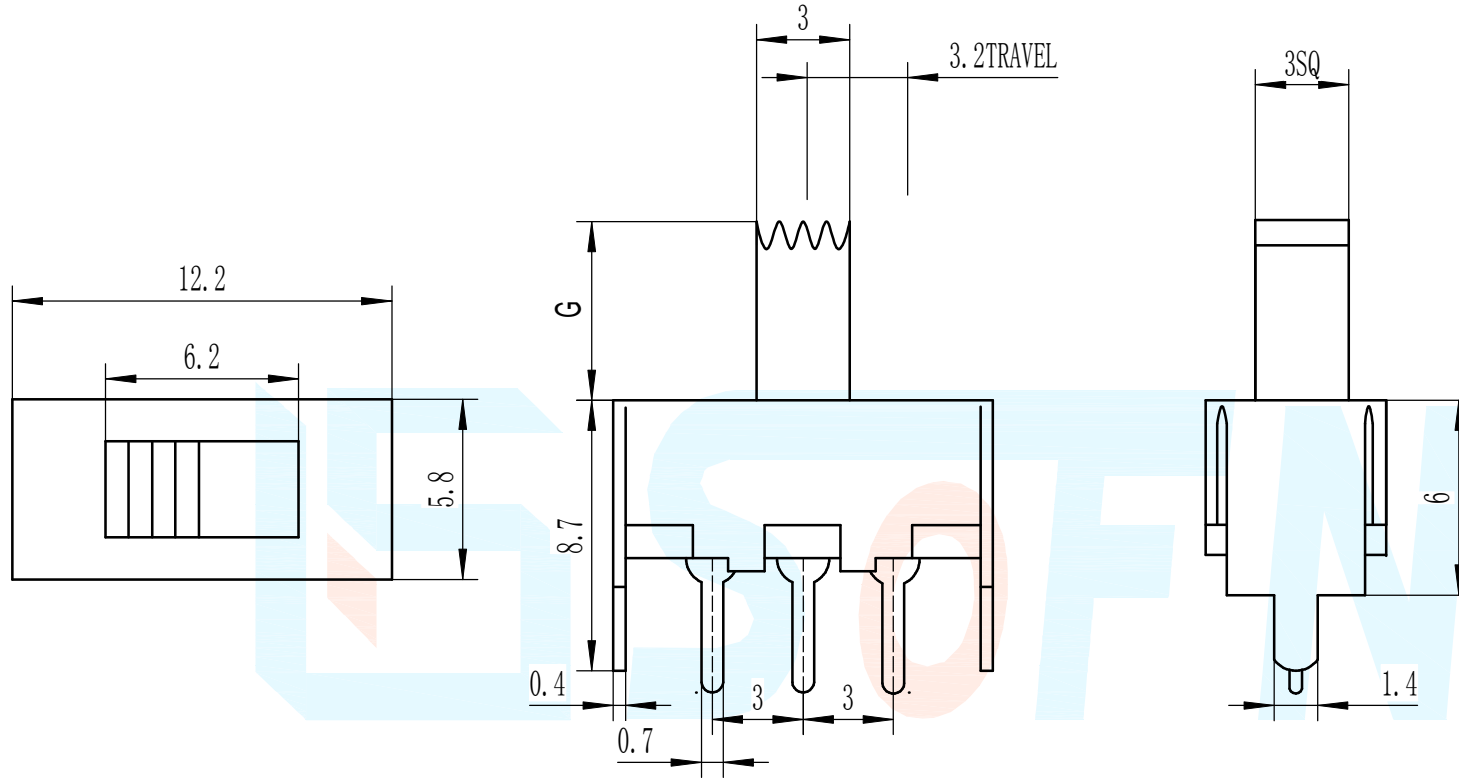


SS-12F44 G

产品型号  
柄长  
G2=2.0mm  
G3=3.0mm  
G4=4.0mm  
G10=10.0mm

Material declaration

No.	NAME	Description
① A	盖板	钢带(镀镍) t=0.40
② B	拨柄	POM (Black)热塑性塑料
③ C	基座	酚醛脂板 PHENOLIC RESIN
④ D	端子	镀银&H62 黄铜带 BRASS STRIP
⑤ E	嵌件	镀银&H62 黄铜带 BRASS STRIP
⑥ F	弹片	不锈钢线 STEEL WIRE

P.C.B LAYOUT

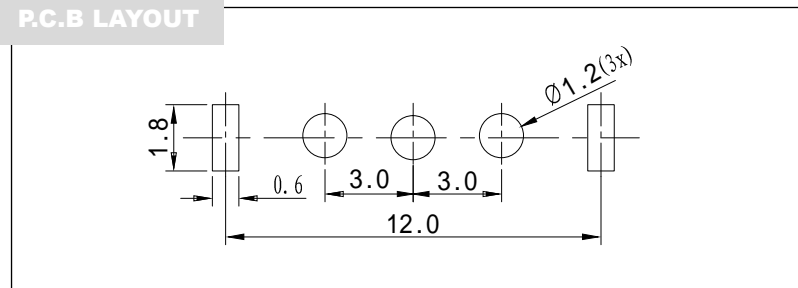

DIMENSION CLASSIFICATION

■ : CRITICAL  
☒ : MAJOR

TOLERANCE TABLE

.X	± 0.40
.XX	± 0.25
.XXX	± 0.10
ANGLE	± 2°

台湾碩方精密电子科技有限公司  
TAIWAN SOFNG PRECISION ELECTRONIC CO., LTD



TITLE SS-12F44 立插式拨动开关-大型二档位

開關, 連接器  
SOFNG

PART NO.	SS-12F44	SERIES	SD106
APPROVED	Peck	DWG NO.	SOF-G006
CHECKED	Paul	SCALE	1:1
DRAWIN	David	UNIT	mm
REV	AO	SIZE	A4
SHEET NO.	1/1		