




■ Features :

- True sine wave output (THD<3%)
- High surge power up to 1400W
- High efficiency up to 91%
- Power ON-OFF switch
- Standby saving mode can be selectable
- Front panel indicator for operation status
- Built-in fan ON-OFF control function
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Reverse polarity / Overload
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- 3 years warranty



SPECIFICATION


MODEL	TS-700-112	TS-700-124	TS-700-148	TS-700-212	TS-700-224	TS-700-248
OUTPUT	RATED POWER (Typ.) 700W					
	MAXIMUM OUTPUT POWER (Typ.) 800W for 180 sec. / 1050W for 10 sec. / surge power 1400W for 30 cycles					
	AC VOLTAGE			AC VOLTAGE		
	Factory setting set at 110VAC			Factory setting set at 230VAC		
	100 / 110 / 115 / 120VAC selectable by setting button S.W			200 / 220 / 230 / 240VAC selectable by setting button S.W		
	FREQUENCY 60±0.1Hz 50/60Hz selectable by setting button S.W					
	50±0.1Hz 50/60Hz selectable by setting button S.W					
WAVEFORM True sine wave (THD<3%) at rated input voltage						
AC REGULATION (Typ.) ±3.0%						
SAVING MODE (Typ.) Default disabled. Load ≤ 5W will be changed to standby mode						
FRONT PANEL INDICATOR Battery voltage level, output load level, saving mode, fault and operation status						
INPUT	BAT. VOLTAGE		BAT. VOLTAGE		BAT. VOLTAGE	
	12V		24V		48V	
	VOLTAGE RANGE (Typ.) <sup>Note.3</sup>		VOLTAGE RANGE (Typ.) <sup>Note.3</sup>		VOLTAGE RANGE (Typ.) <sup>Note.3</sup>	
	10.5 ~ 15VDC		21 ~ 30VDC		42 ~ 60VDC	
	DC CURRENT (Typ.)		DC CURRENT (Typ.)		DC CURRENT (Typ.)	
	75A		38A		19A	
	NO LOAD DISSIPATION		NO LOAD DISSIPATION		NO LOAD DISSIPATION	
≤ 6W @ standby saving mode		≤ 6W @ standby saving mode		≤ 6W @ standby saving mode		
OFF MODE CURRENT DRAW ≤ 1mA						
EFFICIENCY (Typ.) <sup>Note.1</sup>		EFFICIENCY (Typ.) <sup>Note.1</sup>		EFFICIENCY (Typ.) <sup>Note.1</sup>		
86%		88%		89%		
BATTERY TYPES		BATTERY TYPES		BATTERY TYPES		
Open & sealed Lead Acid		Open & sealed Lead Acid		Open & sealed Lead Acid		
BATTERY INPUT PROTECTION	FUSE		FUSE		FUSE	
	40A*3		30A*2		20A*2	
	BAT. LOW ALARM		BAT. LOW ALARM		BAT. LOW ALARM	
	11.3±4%		22.5±4%		45±4%	
BAT. LOW SHUTDOWN		BAT. LOW SHUTDOWN		BAT. LOW SHUTDOWN		
10.5±4%		21±4%		42±4%		
BAT. POLARITY By internal fuse open						
OUTPUT PROTECTION	OVER TEMPERATURE			OVER TEMPERATURE		
	80°C ± 5°C			75°C ± 5°C		
	Protection type : Shut down o/p voltage, re-power on to recover; by internal RTH3 detect on heatsink of power diode					
	OUTPUT SHORT Protection type : Shut down o/p voltage, re-power on to recover					
OVER LOAD (Typ.) 105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.						
Protection type : Shut down o/p voltage, re-power on to recover						
GFCI PROTECTION Optional (Only type F) None						
ENVIRONMENT	WORKING TEMP. <sup>Note.4</sup> 0 ~ +40°C @ 100% load ; +60°C @ 50% load					
	WORKING HUMIDITY 20% ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY -30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH					
	VIBRATION 10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC	SAFETY STANDARDS			SAFETY STANDARDS		
	Design refer to UL458			None		
	LVD			LVD		
	None			EN60950-1		
	WITHSTAND VOLTAGE Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC					
	ISOLATION RESISTANCE AC O/P-FG, Bat I/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
EMC EMISSION				EMC EMISSION		
Compliance to FCC class A				Compliance to EN55022 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark		
EMC IMMUNITY						
None				Compliance to EN61000-4-2,3,8		
OTHERS	MTBF 74.4K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION 295*184*70mm (L*W*H)					
	PACKING 3.8Kg; 2pcs/8.6Kg/1.02CUFT					
NOTE	1.Efficiency is tested by 530W, linear load at 13V, 26V, 52V input voltage. 2.All parameters not specified above are measured at rated load, 25°C of ambient temperature. 3.Output derating capacity referenced by curve 1. 4.Output derating capacity referenced by curve 2.					

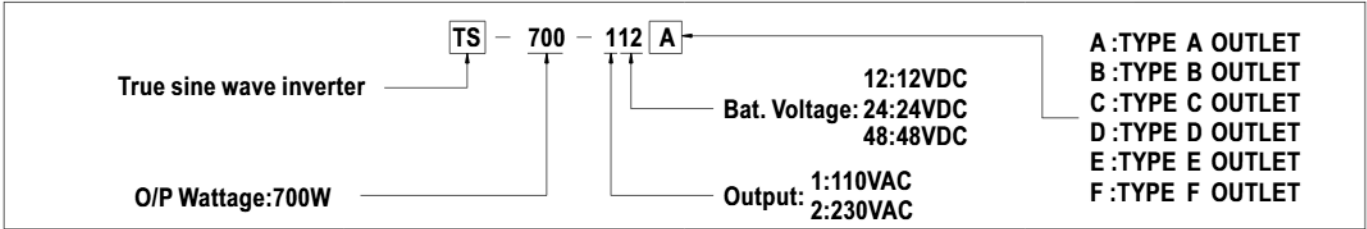

AC Output Receptacles (optional)

Receptacle type						
Country	USA	EUROPE	AUSTRALIA	U.K	JAPAN	GFCI
Certificate	FC	E13 CE	E13 CE	E13 CE	FC	FC

Mechanical Specification

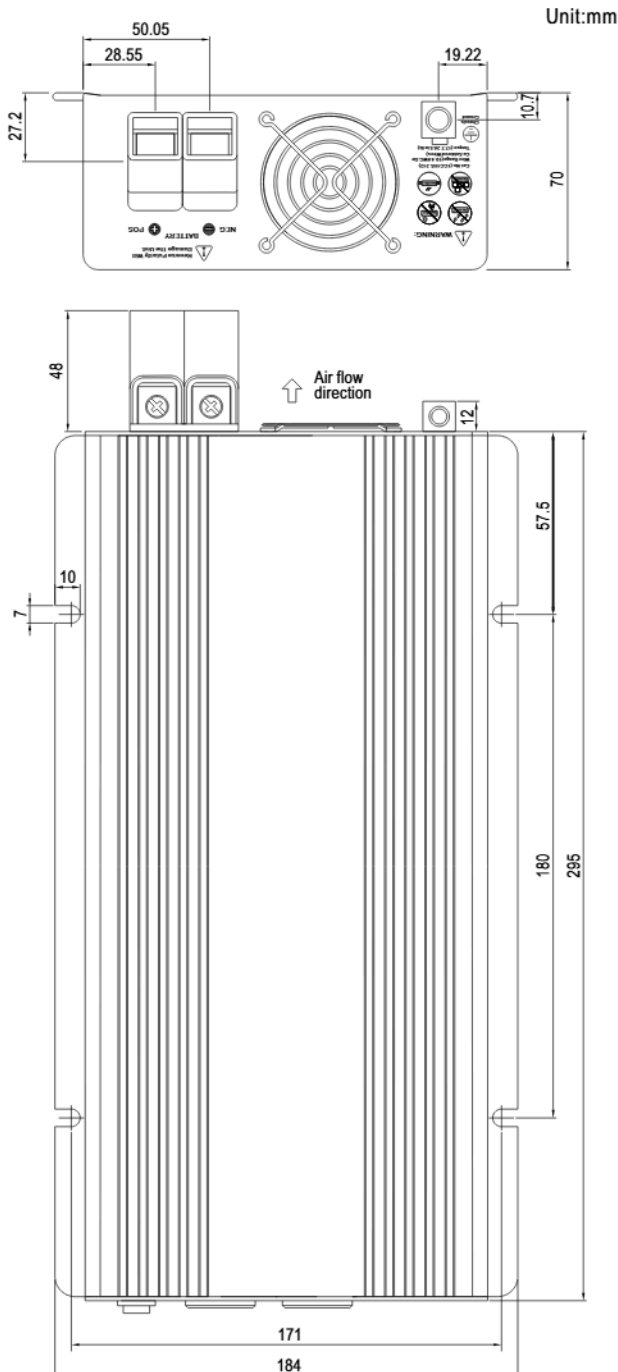

Derating Curve

