


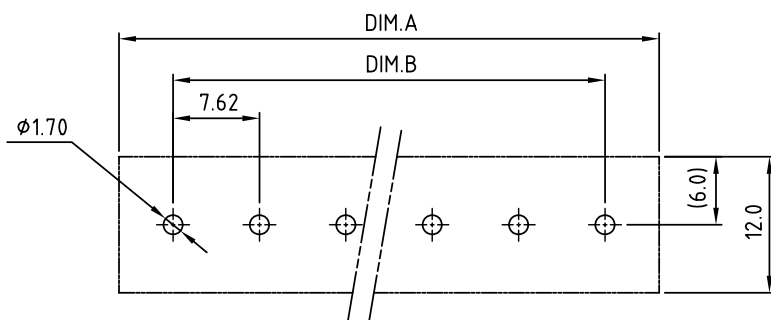

P.C.B LAYOUT(Top View)

SIGN	DATE	DESCRIPTION	APPROVER
	2009.1.7	APPROVAL: cULus	kind
	2009.7.3	COVER TRANSPARENT PVC TO PC	Aaron
	11/20'12	Change the screw plating specification	Jacky
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

MATERIALS ELECTRICAL	
RATED VOLTAGE & CURRENT:	300 V, 15 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANGE:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	6.0Kgf.cm
WIRE RANGE:	14 ~ 22 AWG
1) MOLDED PARTS:	THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, M3
4) COVER	TRANSPARENT,PC

3) TERMINAL SCREWS:

△₂ 4) COVER

△ APPROVAL:  CA US

PART No.:

Critical dimension: ∇C

YK 304xx 2 x x 00G

NO. OF POLES

02: 2 POLES

03: 3 POLES

04: 4 POLES

20: 20 POLES

—G RoHS compliant
(lead<4%) In copper Alloy

— MARK

0: "@" MAK

1: "ANY" MAK

— TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F

△ 1: TERMINAL: G/F, SCREW: Zin

2: TERMINAL: S_n, SCREW: G/F

3: TERMINAL: Sn, SCREW: Zinc

DIM		TOL			
		2P-4P	5P-10P	11P-16P	17P-20P
Dim A	(N-1)×7.62+9.54	±0.20	±0.30	±0.40	±0.50
Dim B	(N-1)×7.62	±0.20	±0.30	±0.40	±0.50

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-304 W/o Flange & With cover Series								
PART NO.	YK304xx2xx00G			DWG NO.	8YK0003-304				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Jacky 2012.11.20	Jacky 2012.11.20					UNIT: mm	
					SCALE: NONE		X.X ±0.30		
				SHEET: 01/01	REV.: D		X.XX ±0.10		
							X° ±1°		