



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-20-006947	08FEB2021	LN	CT

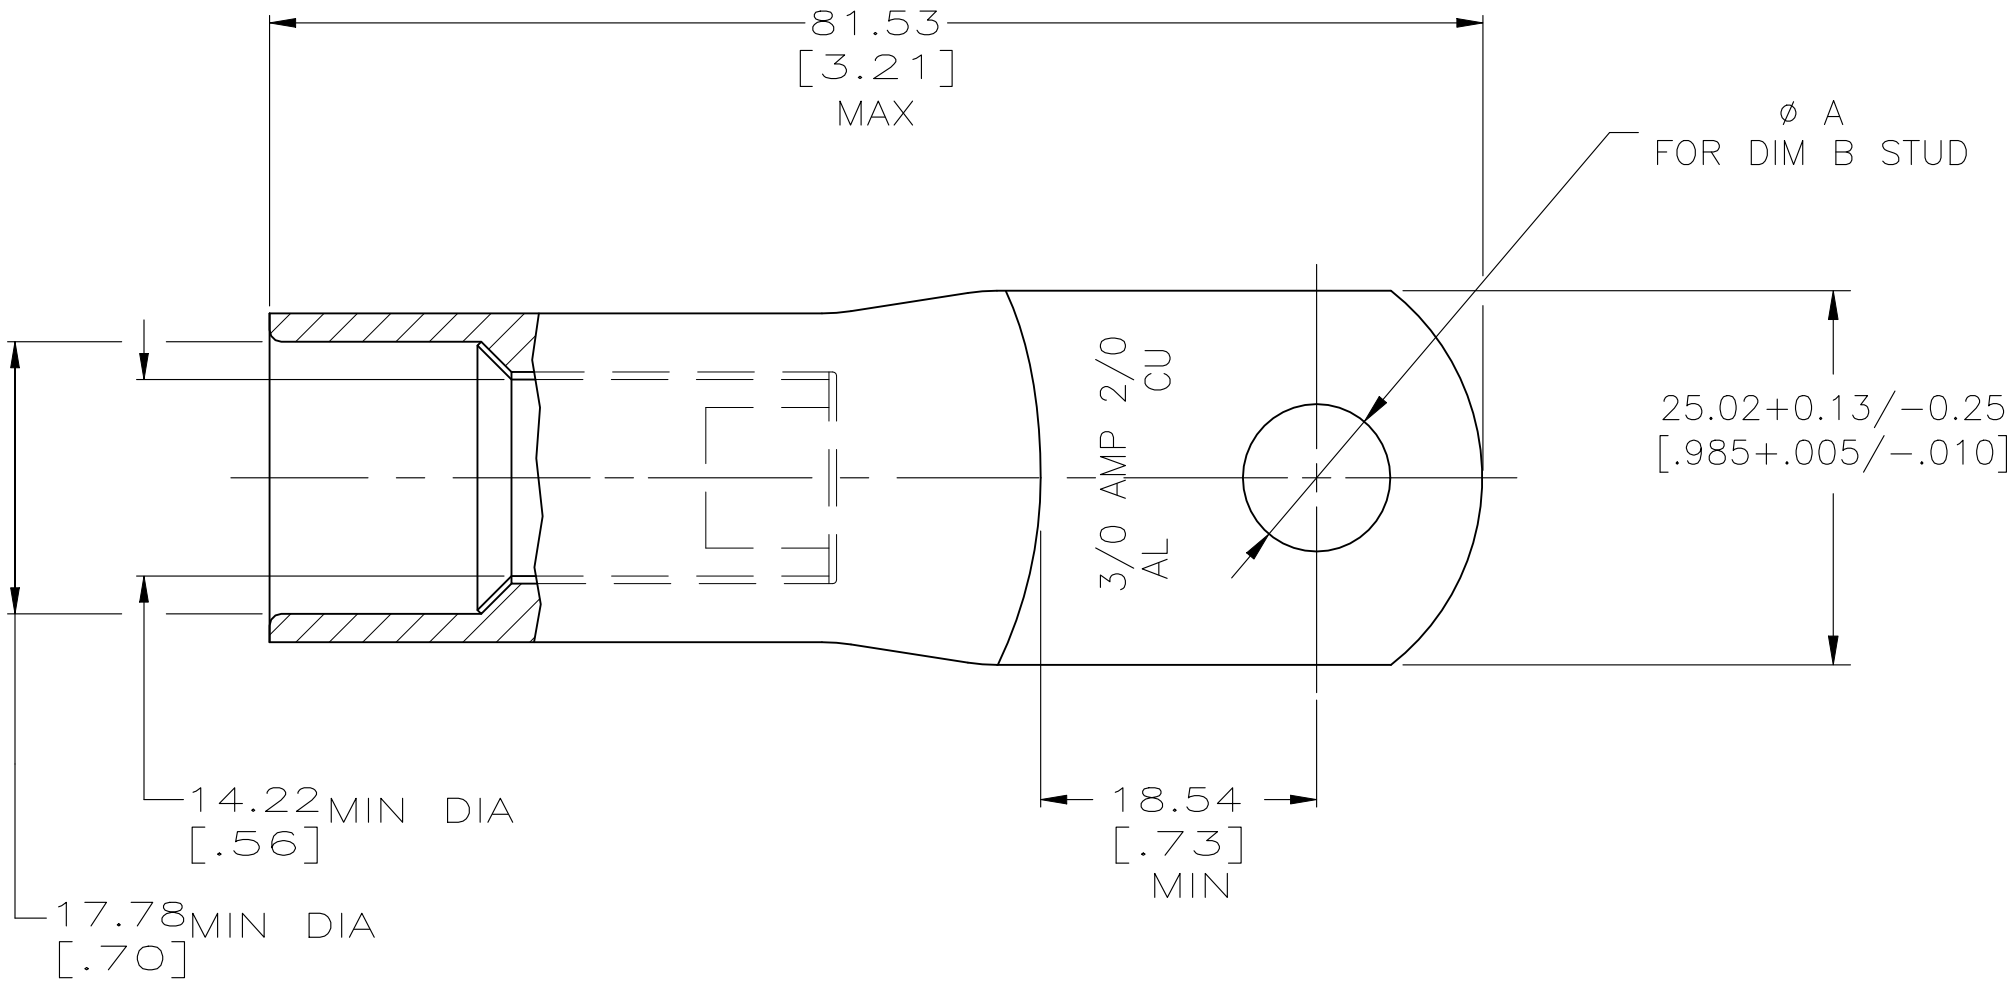


- WIRE INSULATION: 13.21[.520] – 16.38[.645] DIA
-  THE TONGUE RADIUS FEATURE IS NOT A TOOLING DIMENSION AND MAY NOT BE A TRUE RADIUS.
- WEIGHT: 117 GRAMS

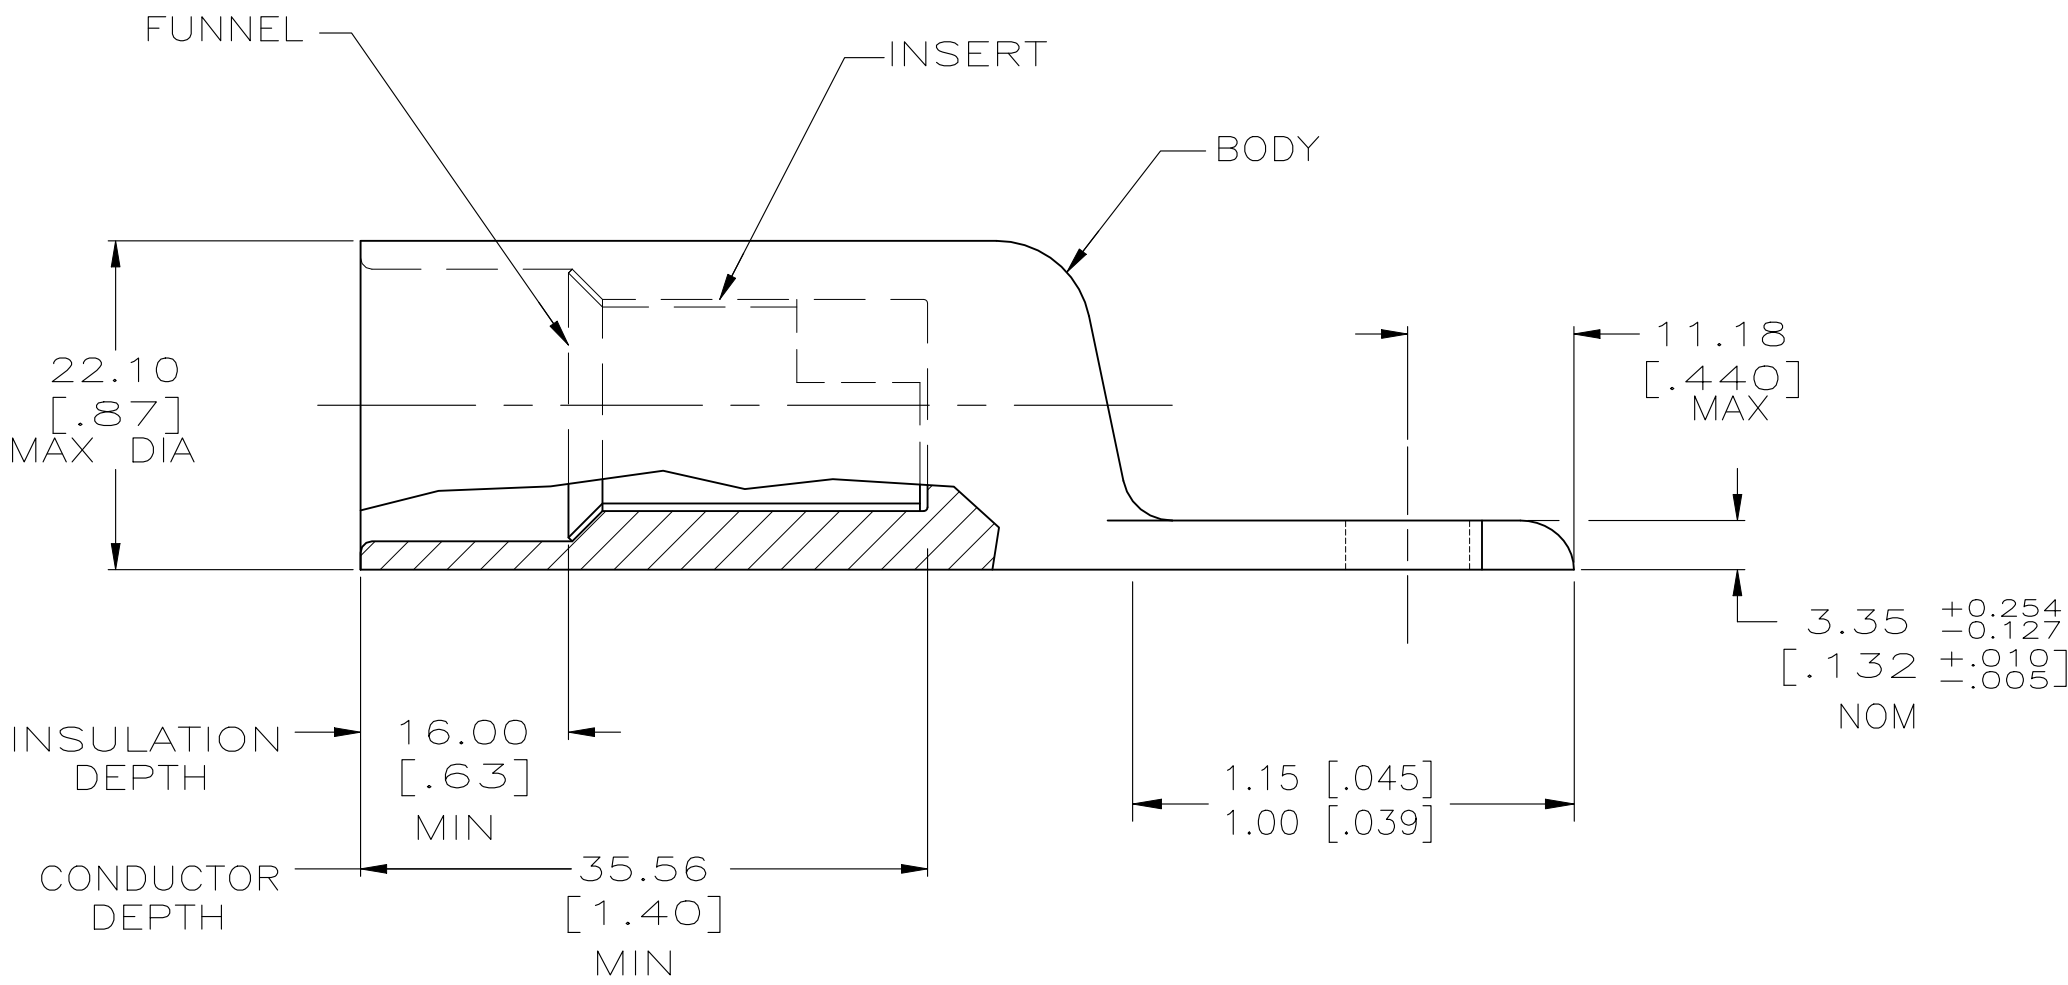

8.33±0.13 [.328±.005]	5/16	277153-3
9.91±0.13 [.390±.005]	3/8	277153-1
Ø A	DIM "B"	PART NO.

BODY: COPPER ASTM-B187 ANNEALED TIN PL MIL-T-10727 0.00381[.000150] MIN THK	-
INSERT & FUNNEL: BRASS ASTM B36	277153-3
NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277153-1
MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS)		DWN DK SCHRUM 6/23/89	 TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK MS FEHER 10/16/90			
		APVD AJ KAUFMAN 10/23/90	NAME TERMINAL, RING TONGUE, SEALED COPALUM 87.2mm2 [3/0] ALUMINUM 68.6mm2 [2/0] COPPER		
		PRODUCT SPEC 108-11011	SIZE A2		
MATERIAL SEE TABLE		APPLICATION SPEC 114-2134	CAGE CODE 00779		
FINISH SEE TABLE		WEIGHT 0.000000	DRAWING NO C-277153		
		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1
				REV P	