

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	.015	W
MAX INPUT POWER	.030	W
IMPEDANCE	150 ± 15%	OHM
OUTPUT SPL @ .001W using IEC 318 Coupler (AT 1.0 kHz)	118 ± 3	dBA
DISTORTION (MAX.)	5%	-
FREQUENCY RANGE	20 ~ 10,000	Hz
HOUSING MATERIAL	ABS	-
CONE MATERIAL	MYLAR	-
MAGNET MATERIAL	NdFeB	-
OPERATING TEMPERATURE	-20 ~ +60	°C
WEIGHT	5.2	grams



THIS DOCUMENT CONTAINS DATA PROPRIETARY TO
PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED,
INC. IS PROHIBITED.

ALL PURCHASES ARE SUBJECT TO THE PUI
AUDIO TERMS AND CONDITIONS SALE FOUND
AT [http://www.puiaudio.com/pdf/terms_condition](http://www.puiaudio.com/pdf/terms_condition.pdf)
.pdf (paper copy available upon request).

©2003, Projects Unlimited Inc.

REVISION HISTORY	
1	Initial Release
2	Minor corrections and updates
3	Major revision: New features added
4	Minor updates and bug fixes
5	Final release

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	10/21/2015	

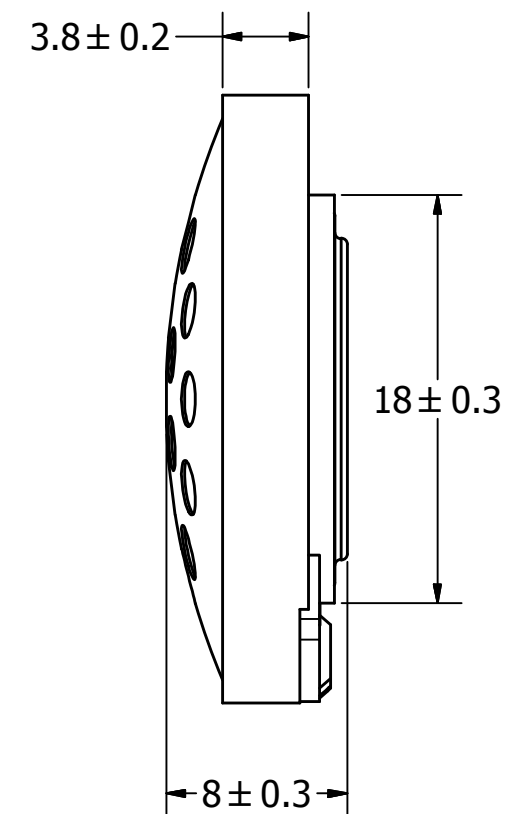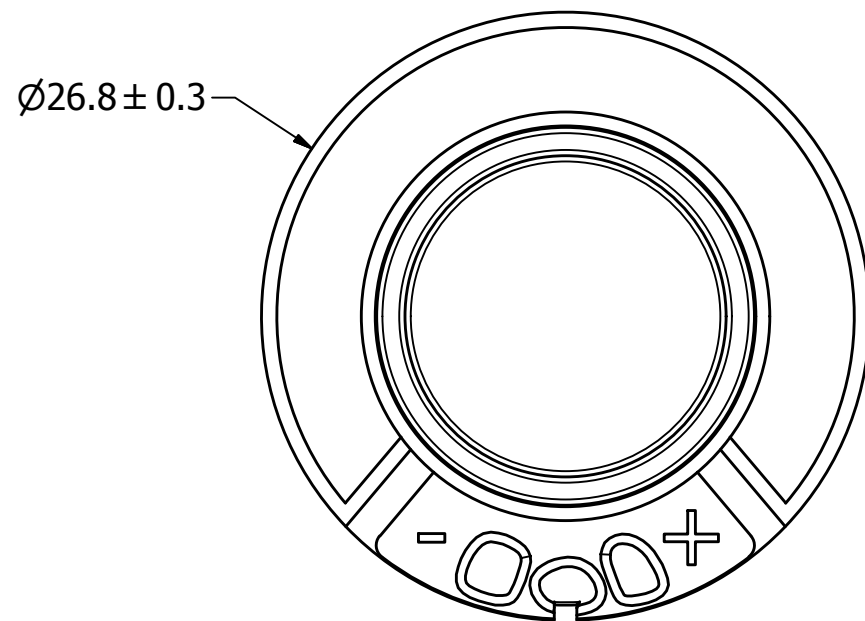

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE A3	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
		J.D.	10/21/2015	B.R.	10/21/2015	R.W.	10/21/2015	10/21/2015
	 pui audio TM inc a projects unlimited company		AR027150MR-2-R					
Receiver					Edition -	Sheet 1 / 1		
AR027150MR-2-R.idw								